

# **MDE08N054RH**

## **Single N-channel Trench MOSFET 80V**

**MDE08N054RH – Single N-Channel Trench MOSFET 80V**



### **General Description**

The MDE08N054RH uses advanced Magnachip's MOSFET Technology, which provides high performance in on-state resistance, fast switching performance and excellent quality.

These devices can also be utilized in industrial applications such as Low Power Drives of E-bike (E-Vehicles), DC/DC converter, and general purpose applications.

### **Features**

- $V_{DS} = 80V$
- $I_D = 120 A @ V_{GS} = 10V$
- $R_{DS(ON)} < 5.4 m\Omega @ V_{GS} = 10V$
- 175 °C operating temperature
- 100% UIL Tested
- 100%  $R_g$  Tested
- 100%  $\Delta V_{DS}$  Tested

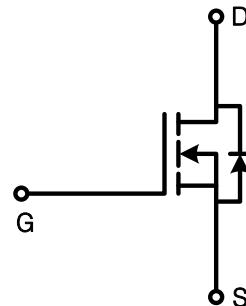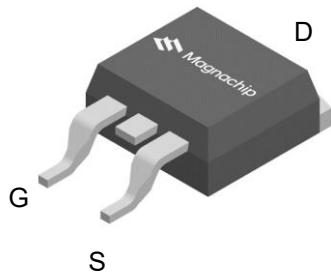

**TO-263**

### **Absolute Maximum Ratings ( $T_J = 25^\circ C$ )**

<b>Characteristics</b>		<b>Symbol</b>	<b>Rating</b>	<b>Unit</b>
Drain-Source Voltage		$V_{DSS}$	80	V
Gate-Source Voltage		$V_{GSS}$	$\pm 20$	V
Continuous Drain Current <sup>(1)</sup>	$T_C=25^\circ C$ (Silicon Limited)	$I_D$	132	A
	$T_C=25^\circ C$ (Package Limited)		120	
	$T_C=100^\circ C$ (Silicon Limited)		93	
	$T_A=25^\circ C$		14.9	
Pulsed Drain Current <sup>(2)</sup>		$I_{DM}$	480	
Power Dissipation	$T_C=25^\circ C$	$P_D$	188	W
	$T_C=100^\circ C$		94	
	$T_A=25^\circ C$		2.4	
Single Pulse Avalanche Energy <sup>(3)</sup>		$E_{AS}$	198	mJ
Junction and Storage Temperature Range		$T_J, T_{stg}$	-55~175	°C

### **Thermal Characteristics**

<b>Characteristics</b>	<b>Symbol</b>	<b>Rating</b>	<b>Unit</b>
Thermal Resistance, Junction-to-Ambient <sup>(1)</sup>	$R_{\theta JA}$	62.5	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.8	

## Ordering Information


Part Number	Temp. Range	Package	Packing	RoHS Status
MDE08N054RH	-55~175°C	TO-263	Reel	Halogen Free

## Electrical Characteristics ( $T_J = 25^\circ\text{C}$ )


Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
<b>Static Characteristics</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$I_D = 250\mu\text{A}, V_{GS} = 0\text{V}$	80	-	-	V
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	2.4		3.8	
Drain Cut-Off Current	$I_{\text{DSS}}$	$V_{DS} = 80\text{V}, V_{GS} = 0\text{V}$	-	-	1.0	$\mu\text{A}$
Gate Leakage Current	$I_{GSS}$	$V_{GS} = \pm 20\text{V}, V_{DS} = 0\text{V}$	-	-	$\pm 100$	nA
Drain-Source ON Resistance	$R_{DS(\text{ON})}$	$V_{GS} = 10\text{V}, I_D = 50\text{A}$		4.4	5.4	$\text{m}\Omega$
Forward Transconductance	$g_{fs}$	$V_{DS} = 10\text{V}, I_D = 50\text{A}$	-	81	-	S
<b>Dynamic Characteristics</b>						
Total Gate Charge	$Q_{g(10\text{V})}$	$V_{DD} = 40\text{V}, I_D = 50\text{A}, V_{GS} = 10\text{V}$	-	61	-	nC
Gate-Source Charge	$Q_{gs}$		-	18	-	
Gate-Drain Charge	$Q_{gd}$		-	15	-	
Input Capacitance	$C_{iss}$	$V_{DS} = 40\text{V}, V_{GS} = 0\text{V}, f = 1.0\text{MHz}$	-	4137	-	pF
Reverse Transfer Capacitance	$C_{rss}$		-	40	-	
Output Capacitance	$C_{oss}$		-	969	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{GS} = 10\text{V}, V_{DD} = 40\text{V}, I_D = 50\text{A}, R_G = 3\Omega,$ $I_F = 50\text{A}, dI/dt = 100\text{A}/\mu\text{s}$	-	23.5	-	ns
Rise Time	$t_r$		-	13.1	-	
Turn-Off Delay Time	$t_{d(off)}$		-	42.9	-	
Fall Time	$t_f$		-	13.6	-	
Gate Resistance	$R_g$	$f=1.0 \text{ MHz}$	-	2.5	-	$\Omega$
<b>Drain-Source Body Diode Characteristics</b>						
Source-Drain Diode Forward Voltage	$V_{SD}$	$I_S = 50\text{A}, V_{GS} = 0\text{V}$	-	0.9	1.2	V
Body Diode Reverse Recovery Time	$t_{rr}$	$I_F = 50\text{A}, dI/dt = 100\text{A}/\mu\text{s}$	-	86	-	ns
Body Diode Reverse Recovery Charge	$Q_{rr}$		-	270	-	nC

Note :


1. Surface mounted FR-4 board by JEDEC (jesd51-7)
2. Pulse width limited by  $T_{j,\text{max}}$
3.  $E_{AS}$  is tested at starting  $T_J = 25^\circ\text{C}$ ,  $L = 1.0\text{mH}$ ,  $I_{AS} = 19.9\text{A}$ ,  $V_{DD} = 50\text{V}$ ,  $V_{GS} = 10\text{V}$

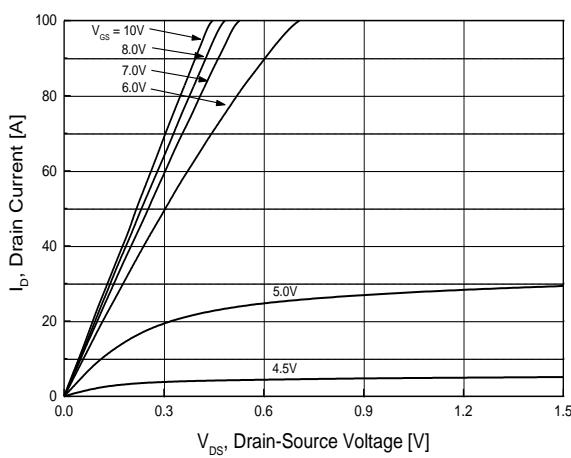


**Fig.1 On-Region Characteristics**

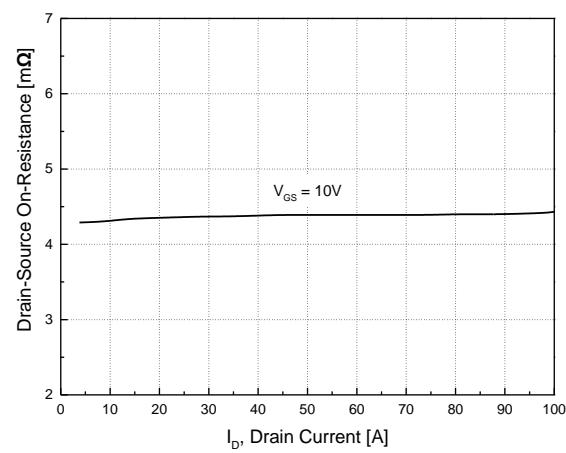


**Fig.2 On-Resistance Variation with Drain Current and Gate Voltage**

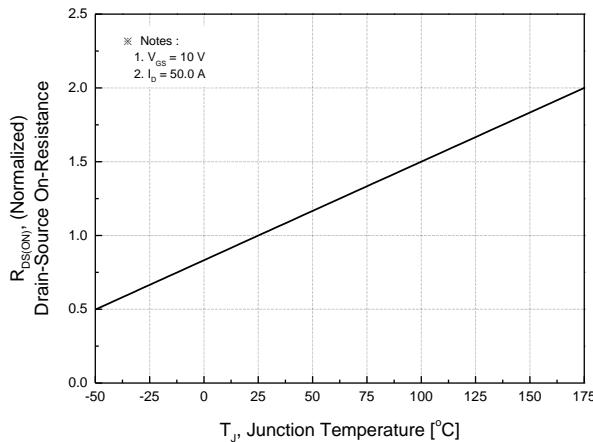


**Fig.3 On-Resistance Variation with Temperature**

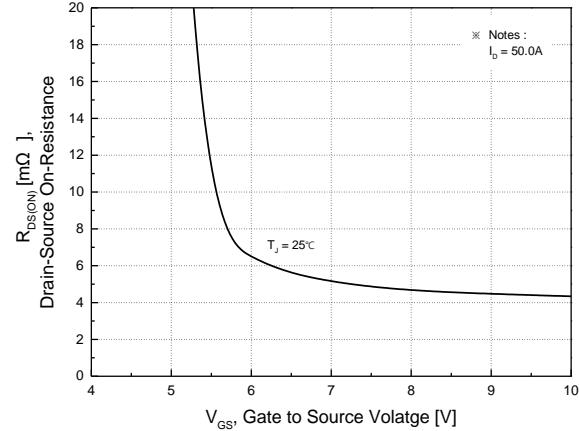


**Fig.4 On-Resistance Variation with Gate to Source Voltage**

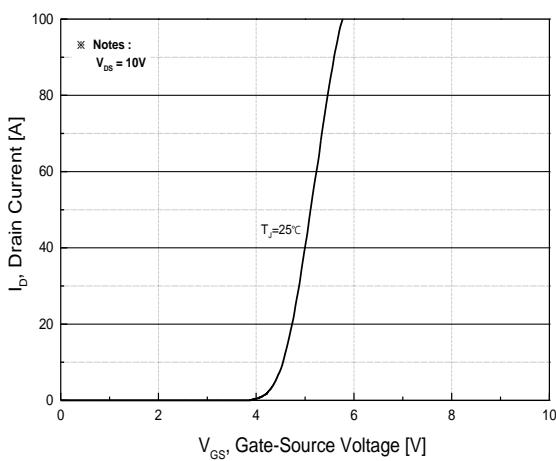


**Fig.5 Transfer Characteristics**

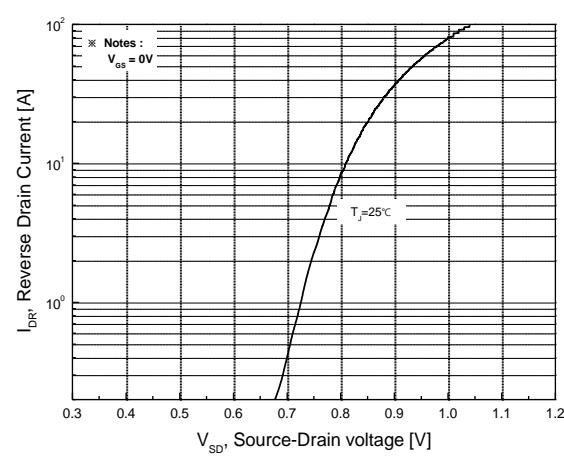


**Fig.6 Body Diode Forward Voltage Variation with Source Current and Temperature**

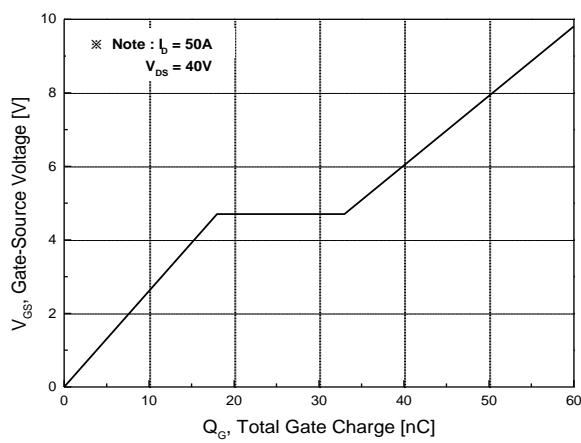


**Fig.7 Gate Charge Characteristics**

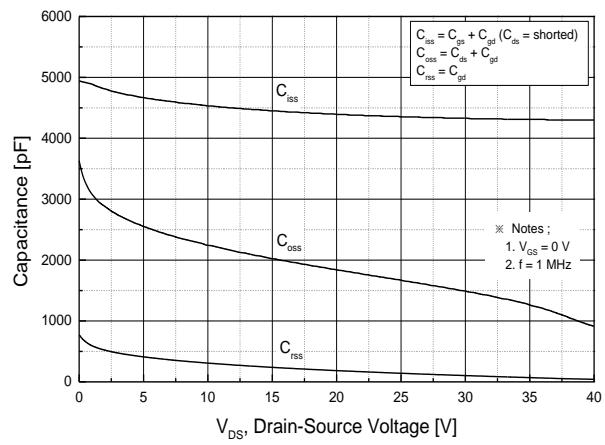


**Fig.8 Capacitance Characteristics**

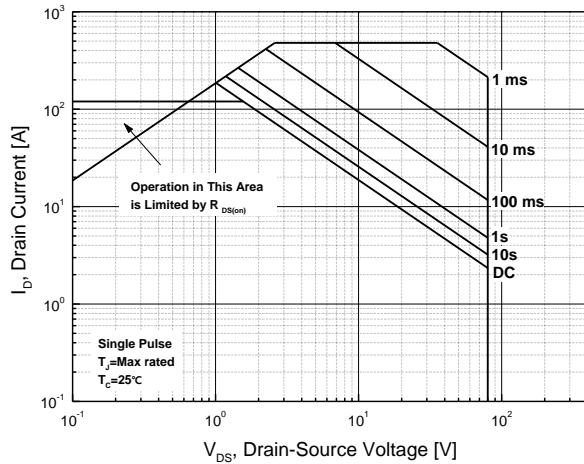

**Fig.9 Maximum Safe Operating Area**

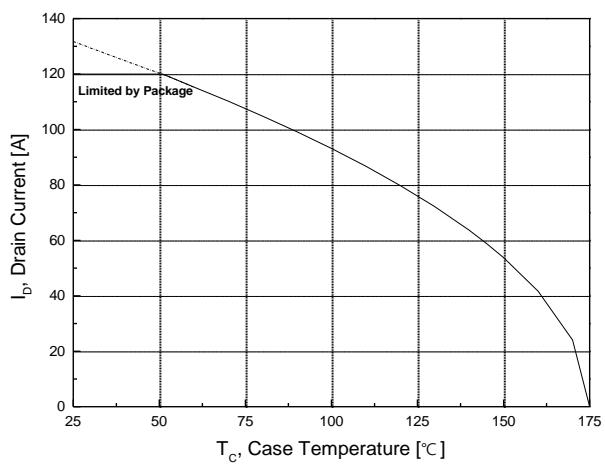

**Fig.10 Maximum Drain Current vs. Case Temperature**

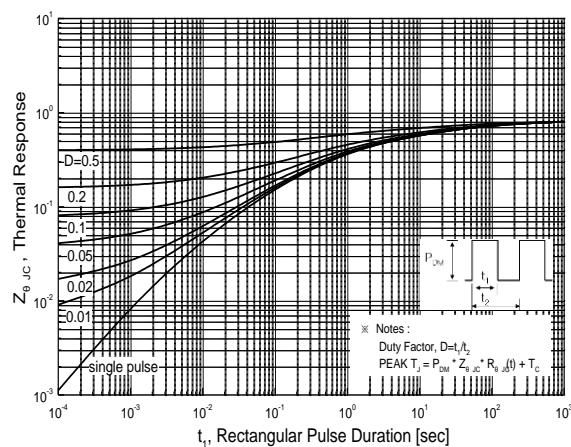


**Fig.11 Transient Thermal Response Curve**

## Package Dimension

### TO-263

Dimensions are in millimeters, unless otherwise specified

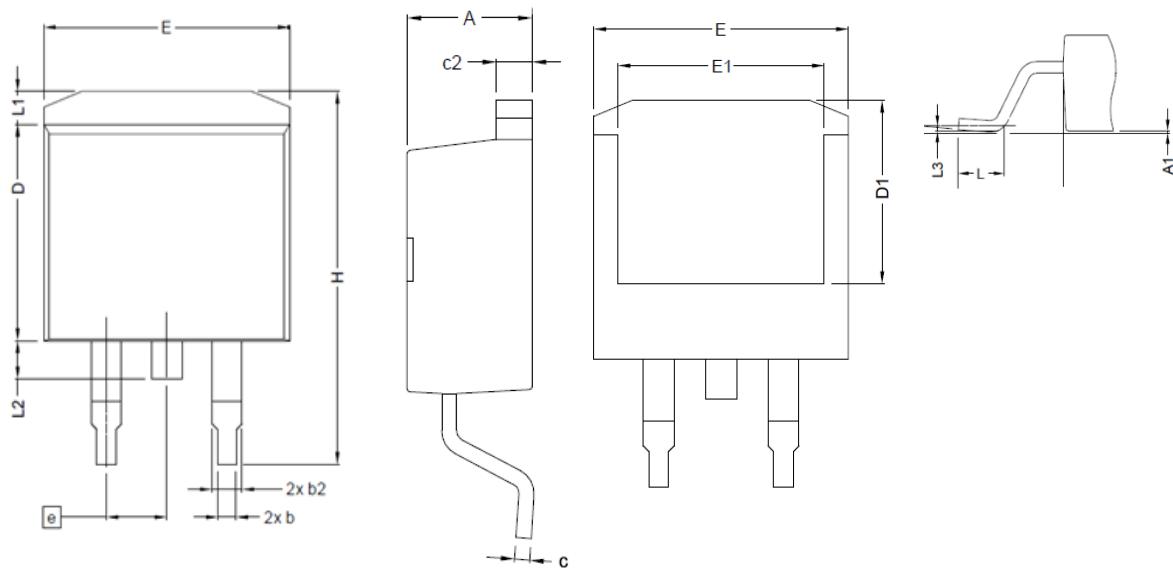

Symbol	Millimeters(mm)	
	Min	Max
A	4.064	4.826
A1	-	0.254
b	0.508	0.99
b2	1.140	1.778
c	0.310	0.736
c2	1.140	1.650
D	8.382	9.652
D1	6.6	-
E	9.652	10.668
E1	6.223	-
e	BSC 2.54	
H	14.605	15.875
L	1.778	2.794
L1	-	1.676
L2	-	1.778
L3	BSC 0.254	

Note : Package body size, length and width do not include mold flash, protrusions and gate burrs.

**DISCLAIMER:**

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

Magnachip reserves the right to change the specifications and circuitry without notice at any time. Magnachip does not consider responsibility for use of any circuitry other than circuitry entirely included in a Magnachip product.  Magnachip is registered trademarks of Magnachip Semiconductor Ltd.