


Magnachip

MDS1654

Single N-Channel Trench MOSFET 30V, 15A, 9.5mΩ

MDS1654 – Single N-channel Trench MOSFET 30V

General Description

The MDS1654 uses advanced Magnachip's MOSFET Technology, which provides low on-state resistance, high switching performance and excellent reliability.



MDS1654 is suitable device for DC-DC Converters and general purpose applications.

Features

- $V_{DS} = 30V$
- $I_D = 15A$ @ $V_{GS} = 10V$
- $R_{DS(ON)} < 9.5m\Omega$ @ $V_{GS} = 10V$
 $< 13.0m\Omega$ @ $V_{GS} = 4.5V$

Applications

- DC-DC Converters



Absolute Maximum Ratings ($T_a = 25^\circ C$)

Characteristics		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	30	V
Gate-Source Voltage		V_{GSS}	± 20	V
Continuous Drain Current	$T_a = 25^\circ C$	I_D	15	A
	$T_a = 100^\circ C$		10.5	A
Pulsed Drain Current		I_{DM}	60	A
Power Dissipation ⁽¹⁾	$T_a = 25^\circ C$	P_D	2.5	W
	$T_a = 100^\circ C$		1.25	
Single Pulse Avalanche Energy ⁽²⁾		E_{AS}	98	mJ
Junction and Storage Temperature Range		T_J, T_{stg}	-55~150	$^\circ C$

Thermal Characteristics

Characteristics	Symbol	Rating	Unit
Thermal Resistance, Junction-to-Ambient ⁽¹⁾	$R_{\theta JA}$	50	$^\circ C/W$
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	25	

Ordering Information

Part Number	Temp. Range	Package	Packing	ROHS Status
MDS1654URH	-55~150°C	SOIC-8	Tape & Reel	Halogen Free

Electrical Characteristics (Ta =25°C)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	I _D = 250μA, V _{GS} = 0V	30	-	-	V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1.0	1.9	3.0	
Drain Cut-Off Current	I _{DSS}	V _{DS} = 30V, V _{GS} = 0V	-	-	1	μA
Gate Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V	-	-	±0.1	
Drain-Source ON Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D = 15A	-	7.1	9.5	mΩ
		V _{GS} = 4.5V, I _D = 12A	-	9.4	13.0	
Forward Transconductance	g _{fs}	V _{DS} = 5V, I _D = 15A	-	19	-	S
Dynamic Characteristics						
Total Gate Charge	Q _{g(10V)}	V _{DS} = 15V, I _D = 15A, V _{GS} = 10V		13.7	-	nC
Total Gate Charge	Q _{g(4.5V)}			6.8	-	
Gate-Source Charge	Q _{gs}		-	2.0	-	
Gate-Drain Charge	Q _{gd}		-	3.5	-	
Input Capacitance	C _{iss}	V _{DS} = 15V, V _{GS} = 0V, f = 1.0MHz	-	1396		pF
Reverse Transfer Capacitance	C _{rss}		-	156		
Output Capacitance	C _{oss}		-	272		
Turn-On Delay Time	t _{d(on)}	V _{GS} = 10V, V _{DS} = 15V, R _L = 3Ω, R _G = 3Ω	-	8.4	-	ns
Rise Time	t _r		-	24.6	-	
Turn-Off Delay Time	t _{d(off)}		-	33	-	
Fall Time	t _f		-	13.6	-	
Drain-Source Body Diode Characteristics						
Source-Drain Diode Forward Voltage	V _{SD}	I _S = 1A, V _{GS} = 0V	-	0.7	1.0	V
Body Diode Reverse Recovery Time	t _{rr}	I _F = 15A, dl/dt = 100A/μs	-	19	21	ns
Body Diode Reverse Recovery Charge	Q _{rr}		-	9	12	nC

Note :

1. Surface mounted FR-4 board with 2oz. Copper.
2. Starting $T_j = 25^\circ C$, $L = 1mH$, $I_{AS} = 14A$, $V_{DD} = 15V$, $V_{GS} = 10V$.

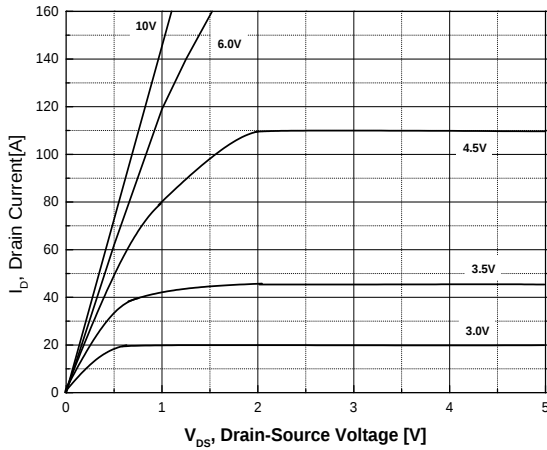


Fig.1 On-Region Characteristics

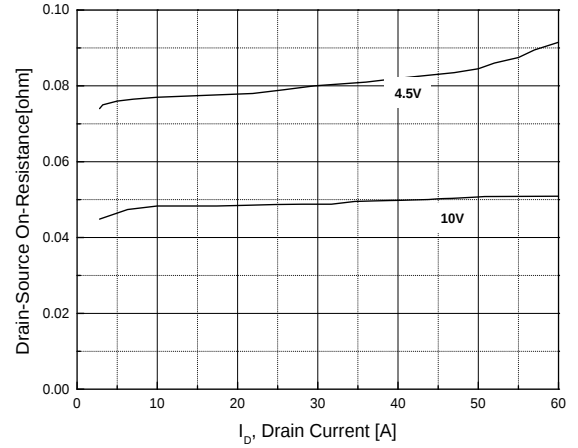


Fig.2 On-Resistance Variation with Drain Current and Gate Voltage

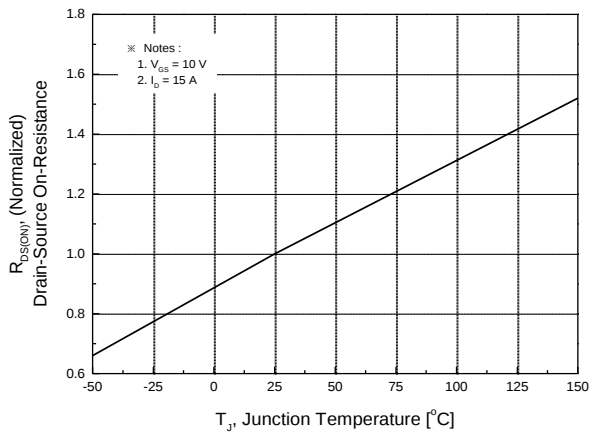


Fig.3 On-Resistance Variation with Temperature

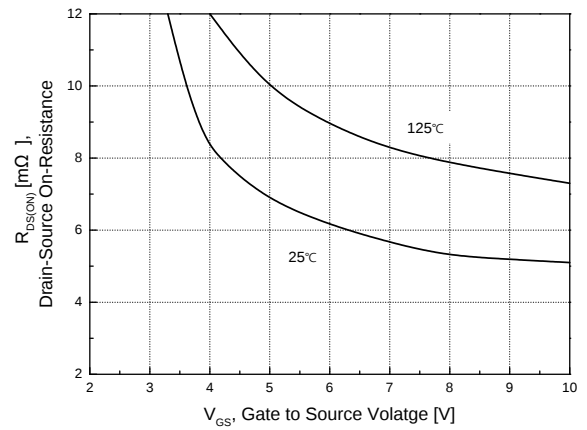


Fig.4 On-Resistance Variation with Gate to Source Voltage

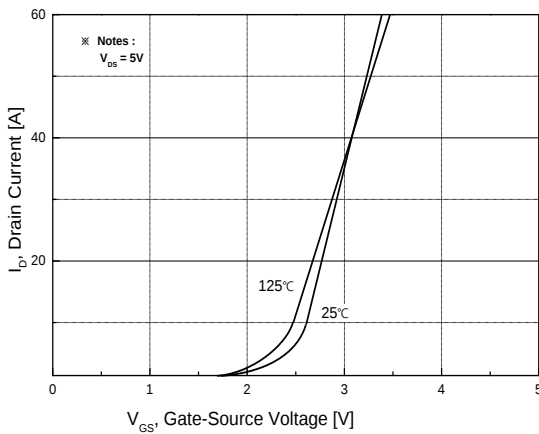


Fig.5 Transfer Characteristics

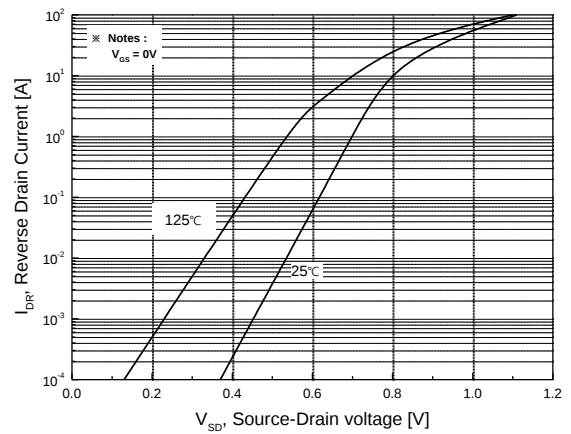


Fig.6 Body Diode Forward Voltage Variation with Source Current and Temperature

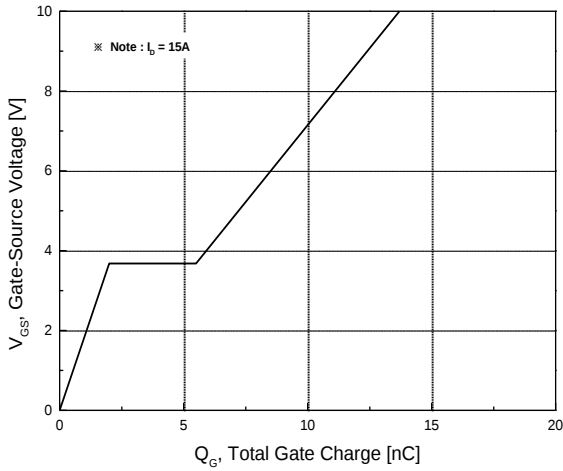


Fig.7 Gate Charge Characteristics

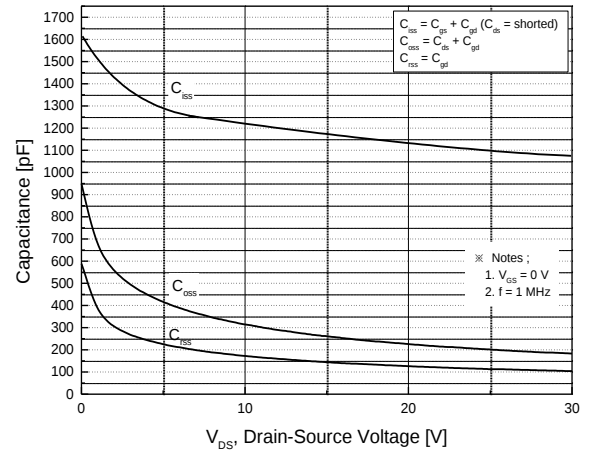


Fig.8 Capacitance Characteristics

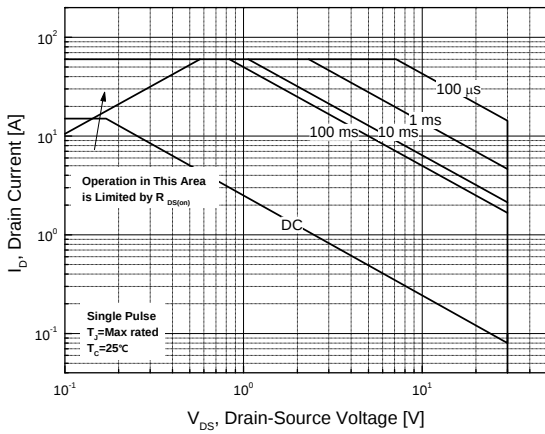


Fig.9 Maximum Safe Operating Area

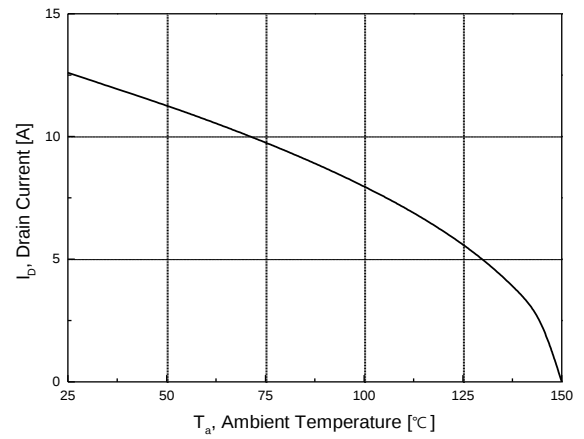


Fig.10 Maximum Drain Current vs. Ambient Temperature


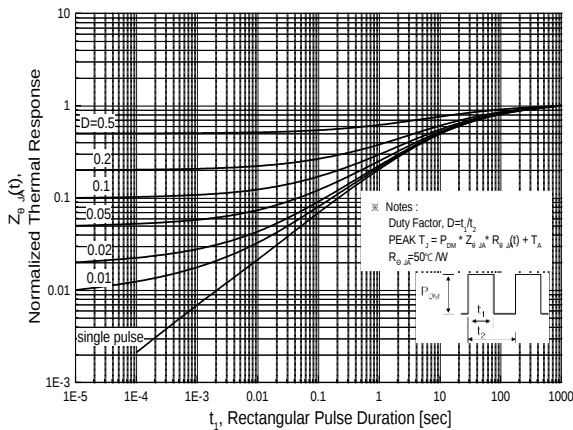


Fig.11 Transient Thermal Response Curve


Physical Dimensions

8 Leads, SOIC

Dimensions are in millimeters unless otherwise specified

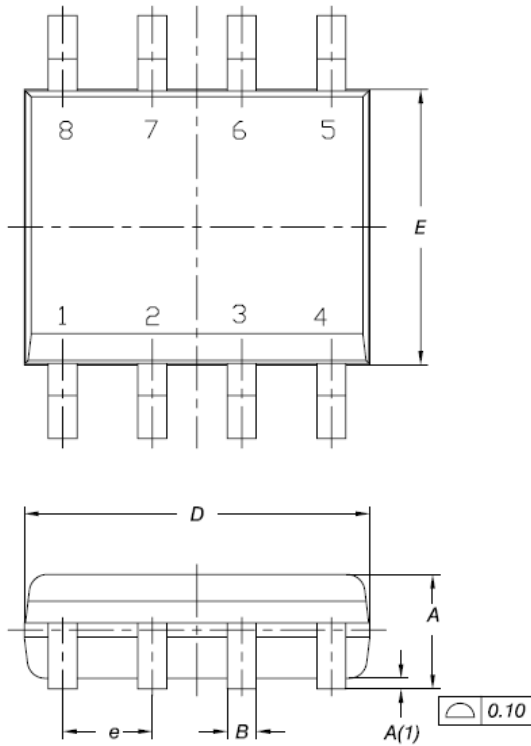

DIM.	MILLIMETERS		
	MIN.	NOM.	MAX.
A	1.35	1.55	1.75
A(1)	0.10	0.175	0.25
B	0.38	0.445	0.51
C	0.19	0.22	0.25
D	4.80	4.90	5.00
E	3.80	3.90	4.00
e	1.27 BSC		
H	5.80	6.00	6.20
L	0.50	0.715	0.93
α	0°	4°	8°
h	0.25	0.375	0.50

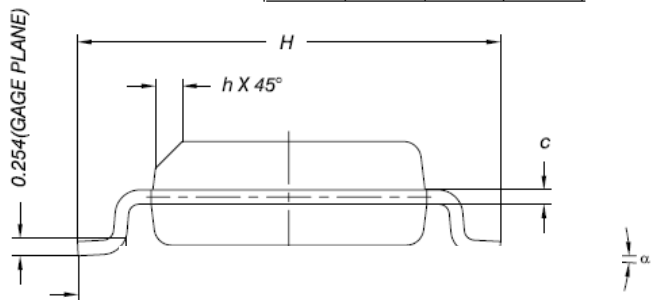

Note : Package body size, length and width do not include mold flash, protrusions and gate burrs.

DISCLAIMER:

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

Magnachip reserves the right to change the specifications and circuitry without notice at any time. Magnachip does not consider responsibility for use of any circuitry other than circuitry entirely included in a Magnachip product.  Magnachip is a registered trademark of Magnachip Semiconductor Ltd.