

MDU1721VRH


Single N-channel Trench MOSFET 40V, 100A, 1.4mΩ

General Description


The MDU1721VRH uses advanced Magnachip’s MOSFET Technology, which provides high performance in on-state resistance, fast switching performance and excellent quality. MDU1721VRH is suitable device for Synchronous Rectification For Server and general purpose applications.

Features

- $V_{DS} = 40V$
- $I_D = 100A @ V_{GS} = 10V$
- $R_{DS(ON)} < 1.4m\Omega @ V_{GS} = 10V$
- 100% UIL Tested
- 100% Rg Tested

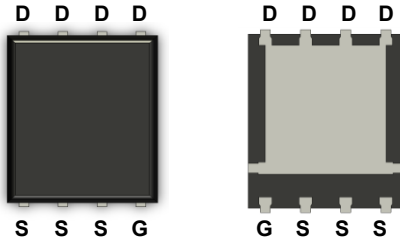

PDFN56

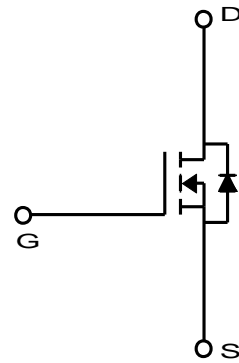

Absolute Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	40	V
Gate-Source Voltage		V_{GSS}	±20	V
Continuous Drain Current ⁽¹⁾	$T_C=25^\circ C$ (Silicon Limited)	I_D	204.1	A
	$T_C=25^\circ C$ (Package Limited)		100.0	
	$T_C=100^\circ C$ (Silicon Limited)		129.1	
	$T_A=25^\circ C^{(3)}$		32.9 ⁽³⁾	
Pulsed Drain Current		I_{DM}	400.0	
Power Dissipation	$T_C=25^\circ C$	P_D	96.2	W
	$T_C=100^\circ C$		38.5	
	$T_A=25^\circ C^{(3)}$		2.5 ⁽³⁾	
Single Pulse Avalanche Energy ⁽²⁾		E_{AS}	450	mJ
Junction and Storage Temperature Range		T_J, T_{stg}	-55~150	°C

Thermal Characteristics

Characteristics	Symbol	Rating	Unit
Thermal Resistance, Junction-to-Ambient ⁽¹⁾	$R_{\theta JA}$	50	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.3	

Ordering Information

Part Number	Temp. Range	Package	Packing	RoHS Status
MDU1721VRH	-55~150°C	PDFN56	Tape & Reel	Halogen Free

Electrical Characteristics (T_J =25°C)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	I _D = 250μA, V _{GS} = 0V	40	-	-	V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1.0	-	3.0	
Drain Cut-Off Current	I _{DSS}	V _{DS} = 32V, V _{GS} = 0V	-	-	1.0	μA
Gate Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V	-	-	±0.1	
Drain-Source ON Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D =50A	-	1.1	1.4	mΩ
Forward Transconductance	g _{fs}	V _{DS} = 10V, I _D =50A	-	120	-	S
Dynamic Characteristics						
Total Gate Charge	Q _{g(10.0V)}	V _{DS} = 20.0V, I _D = 50.0A, V _{GS} = 10V	-	113.8	-	nC
Gate-Source Charge	Q _{gs}		-	23.3	-	
Gate-Drain Charge	Q _{gd}		-	18.6	-	
Input Capacitance	C _{iss}	V _{DS} = 20.0V, V _{GS} = 0V, f = 1.0MHz	-	7,450	-	pF
Reverse Transfer Capacitance	C _{rss}		-	200	-	
Output Capacitance	C _{oss}		-	1,850	-	
Turn-On Delay Time	t _{d(on)}	V _{GS} = 10V, V _{DS} = 20.0V, I _D = 50A , R _G = 3.0Ω	-	24.0	-	ns
Rise Time	t _r		-	16.1	-	
Turn-Off Delay Time	t _{d(off)}		-	92.3	-	
Fall Time	t _f		-	30.0	-	
Gate Resistance	R _g	f=1 MHz	-	1.30	-	Ω
Drain-Source Body Diode Characteristics						
Source-Drain Diode Forward Voltage	V _{SD}	I _S = 50A, V _{GS} = 0V	-	0.80	1.2	V
Body Diode Reverse Recovery Time	t _{rr}	I _F =50A, dI/dt = 100A/μs	-	61.0	-	ns
Body Diode Reverse Recovery Charge	Q _{rr}		-	92.0	-	nC

Note :

- Surface mounted FR-4 board by JEDEC (jesd51-7). Continuous current at T_c=25°C is silicon limited
- E_{AS} is tested at starting T_j = 25°C, L = 1.0mH, I_{AS} = 30.0A, V_{GS} = 10V.
- T < 10sec.

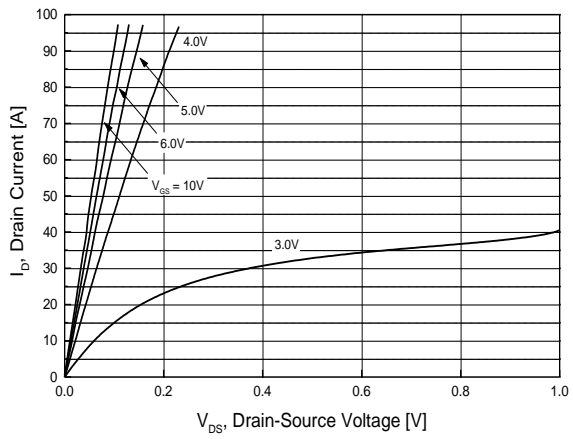


Fig.1 On-Region Characteristics

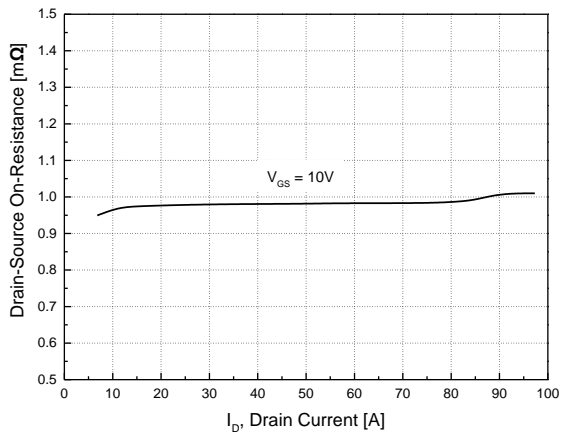


Fig.2 On-Resistance Variation with Drain Current and Gate Voltage

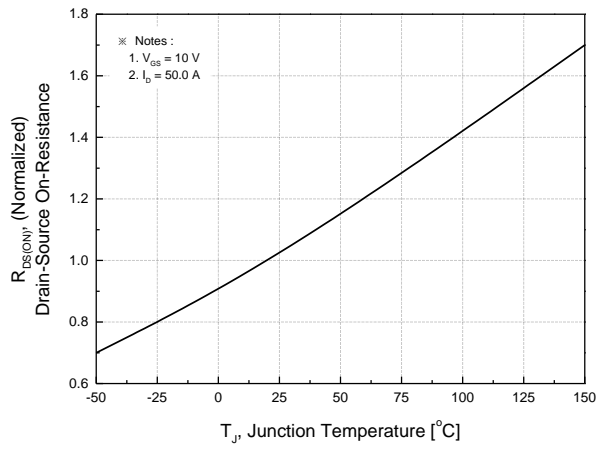


Fig.3 On-Resistance Variation with Temperature

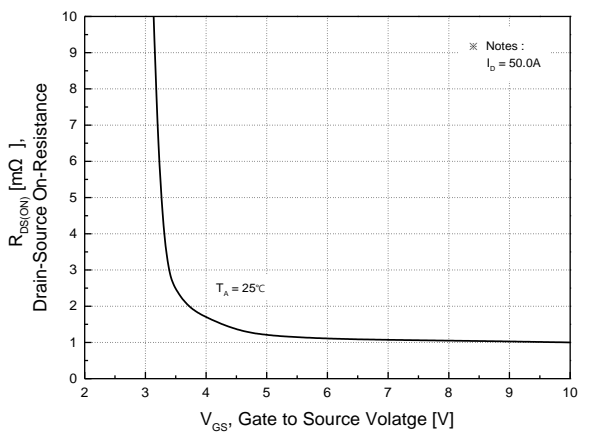


Fig.4 On-Resistance Variation with Gate to Source Voltage

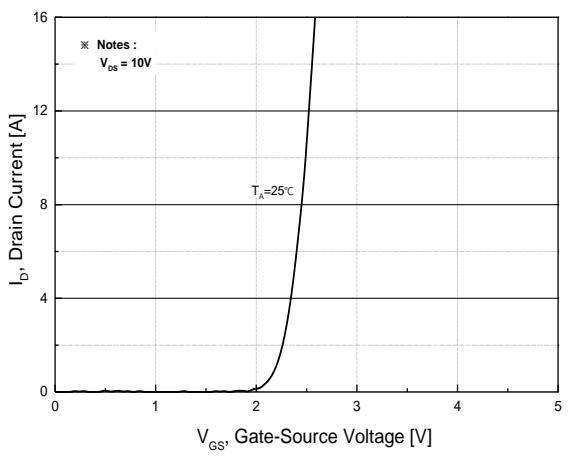


Fig.5 Transfer Characteristics

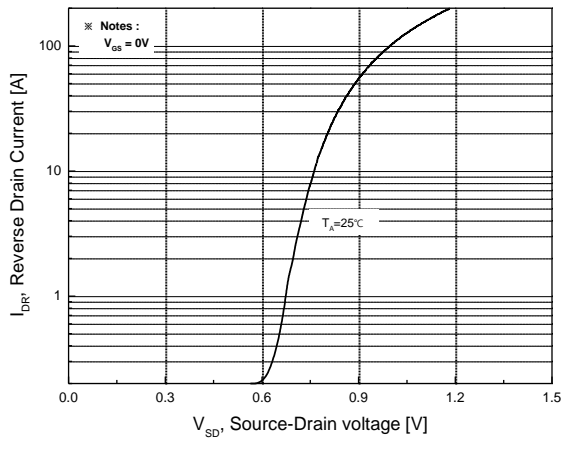


Fig.6 Body Diode Forward Voltage Variation with Source Current and Temperature

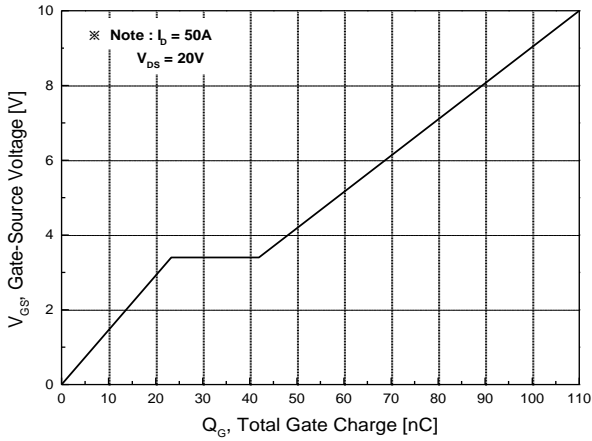


Fig.7 Gate Charge Characteristics

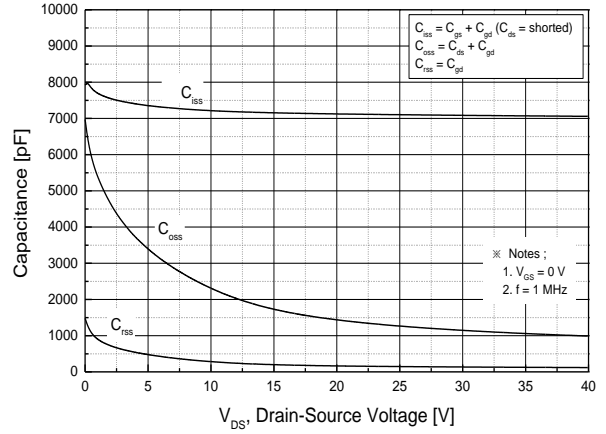


Fig.8 Capacitance Characteristics

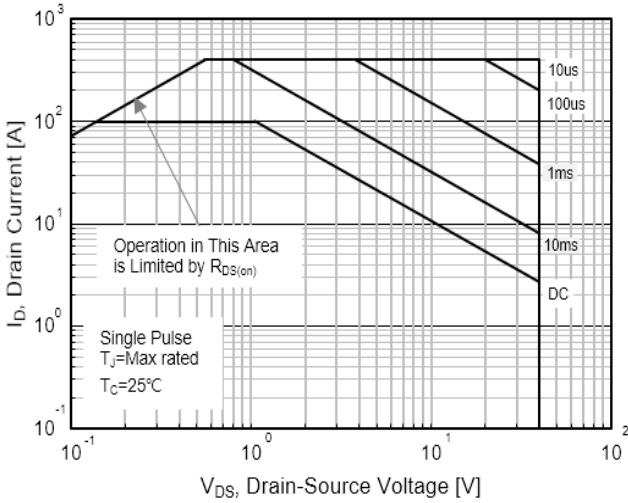


Fig.9 Maximum Safe Operating Area

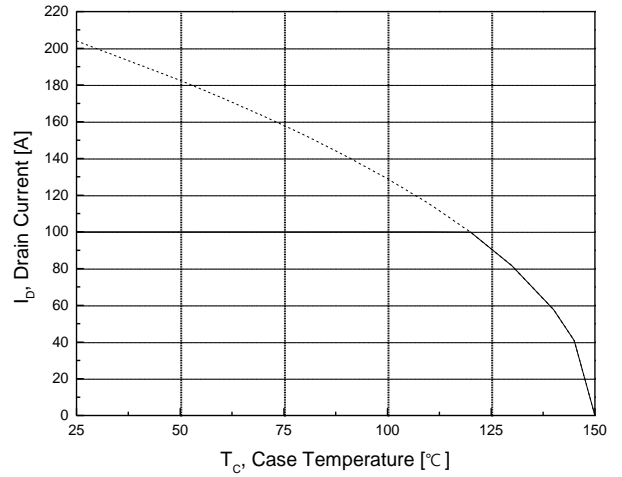


Fig.10 Maximum Drain Current vs. Case Temperature


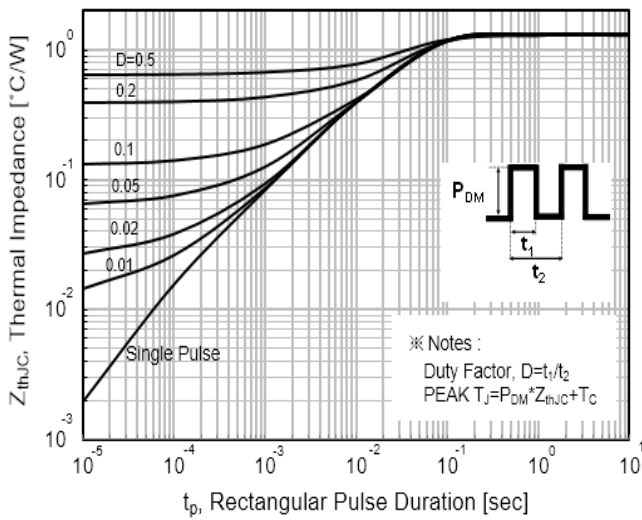


Fig.11 Transient Thermal Response Curve

Package Dimension

PDFN56 (5x6mm)

Dimensions are in millimeters, unless otherwise specified

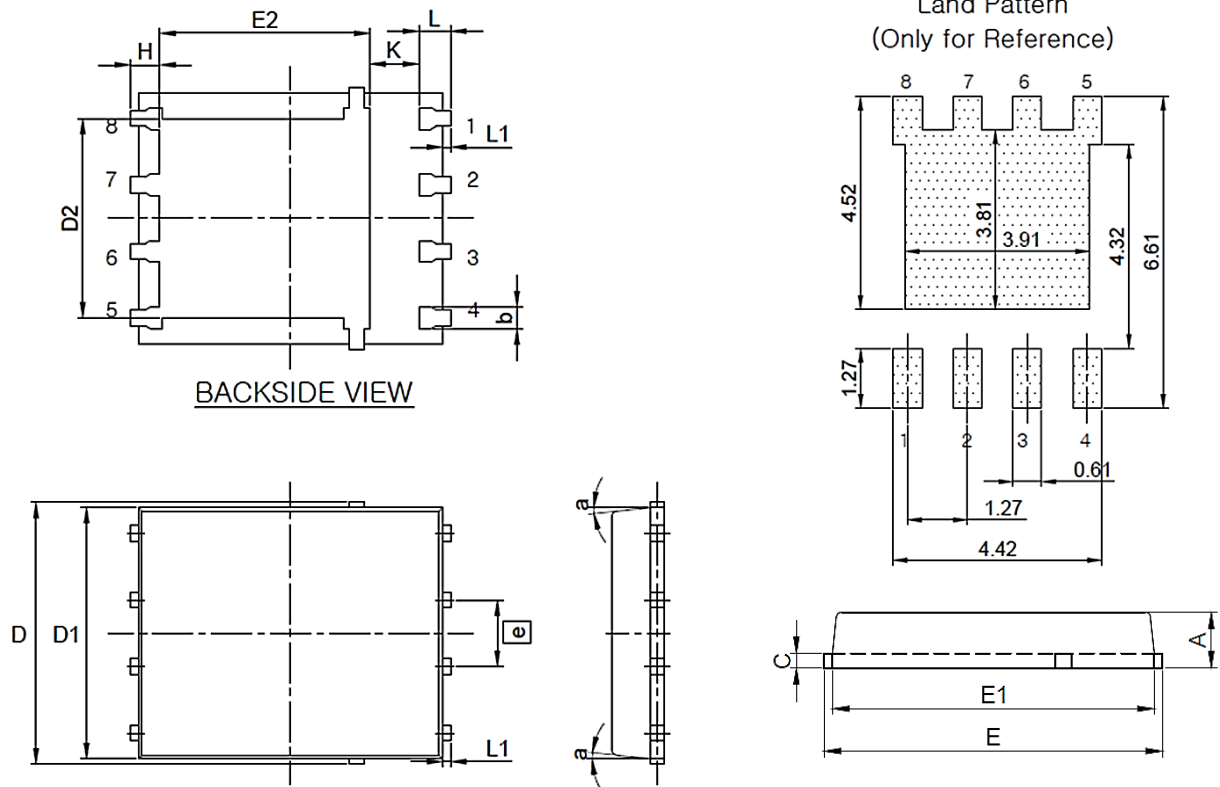


Symbol	Dimension (mm)		
	Min	Nom	Max
A	0.90	–	1.10
b	0.33	–	0.51
C	0.20	–	0.34
D	4.50	–	5.30
D1	4.50	–	5.10
D2	–	–	4.22
E	5.90	–	6.30
E1	5.50	–	6.10
E2	–	–	4.30
e	1.27 BSC		
H	0.41	–	0.71
K	0.20	–	–
L	0.51	–	0.71
L1	0.06	–	0.20
a	0°	–	12°

Note : Package body size, length and width do not include mold flash, protrusions and gate burrs.

DISCLAIMER:

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

Magnachip reserves the right to change the specifications and circuitry without notice at any time. Magnachip does not consider responsibility for use of any circuitry other than circuitry entirely included in a Magnachip product.  Magnachip is a registered trademark of Magnachip Semiconductor Ltd.