

MMTB65R099RF

650V 0.099Ω N-channel MOSFET


Description

MMTB65R099RF is power MOSFET using Magnachip's advanced super junction technology that can realize very low on-resistance and gate charge. It has low gate charge and ultra-fast body diode, so turn off action is improved. These user friendly devices give an advantage of Low EMI to designers as well as low switching loss in soft switching applications.

Key Parameters

Parameter	Value	Unit
$V_{DS} @ T_{j,max}$	700	V
$R_{DS(on),max}$	0.099	Ω
$V_{GS(th),typ}$	4.0	V
I_D	35	A
$Q_{g,typ}$	76.6	nC

Package & Internal Circuit

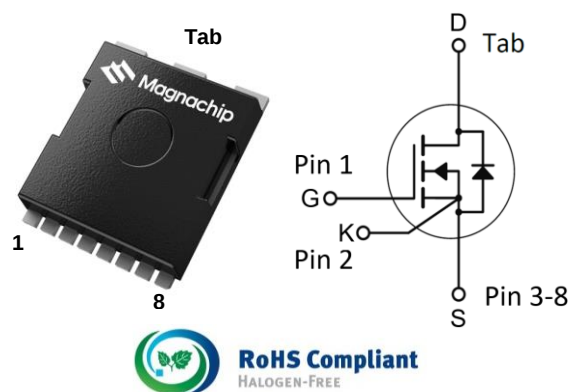

Features

- Ultra-fast body diode
- Low power loss by high speed switching and low on-resistance
- 100% avalanche tested
- Green package – Pb free plating, halogen free

Applications

- Premium OLED TV
- Soft-switching applications
- Server power supply
- Telecom

Ordering Information

Order Code	Marking	Temp. Range	Package	Packing	RoHS Status
MMTB65R099RFRH	65R099RF	-55 ~ 150 °C	TOLL	Reel	Compliant

■ Absolute Maximum Rating ($T_c=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit	Note
Drain – Source voltage	V_{DSS}	650	V	
Gate – Source voltage	V_{GSS}	± 30	V	
Continuous drain current ¹⁾	I_{D}	35	A	$T_c=25^\circ\text{C}$
		22.1	A	$T_c=100^\circ\text{C}$
Pulsed drain current ²⁾	I_{DM}	105	A	
Power dissipation	P_{D}	431	W	
Single - pulse avalanche energy ³⁾	E_{AS}	317	mJ	
MOSFET dv/dt ruggedness	dv/dt	50	V/ns	
Diode dv/dt ruggedness ⁴⁾	dv/dt	50	V/ns	
Storage temperature	T_{stg}	-55 ~150	$^\circ\text{C}$	
Maximum operating junction temperature	T_{j}	150	$^\circ\text{C}$	

1) I_{D} limited by maximum junction temperature

2) Pulse width t_{P} limited by $T_{\text{j,max}}$

3) I_{AS} : 2.12 A

4) $I_{\text{SD}} \leq I_{\text{D}}$, $V_{\text{DS peak}} \leq 400\text{V}$, $T_{\text{j}}=25^\circ\text{C}$

■ Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal resistance, junction-case max	R_{thjc}	0.29	$^\circ\text{C/W}$
Thermal resistance, junction-ambient max	R_{thja}	62.5	$^\circ\text{C/W}$

■ Static Characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Drain – Source breakdown voltage	$V_{(BR)DSS}$	650	-	-	V	$V_{GS} = 0V, I_D = 1mA$
Gate threshold voltage	$V_{GS(th)}$	3.0	4.0	5.0	V	$V_{DS} = V_{GS}, I_D = 250\mu A$
Zero gate voltage drain current	I_{DSS}	-	-	10	μA	$V_{DS} = 650V, V_{GS} = 0V$
Gate leakage current	I_{GSS}	-	-	100	nA	$V_{GS} = \pm 30V, V_{DS} = 0V$
Drain-Source on state resistance	$R_{DS(ON)}$	-	0.088	0.099	Ω	$V_{GS} = 10V, I_D = 17.5A$

■ Dynamic Characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Input capacitance	C_{iss}	-	2968	-	pF	$V_{DS} = 400V, V_{GS} = 0V, f = 400kHz$
Output capacitance	C_{oss}	-	69	-		
Reverse transfer capacitance	C_{rss}	-	9.7	-		
Effective output capacitance energy related ⁵⁾	$C_{o(er)}$	-	119	-		$V_{DS} = 0V \text{ to } 520V, V_{GS} = 0V, f = 400kHz$
Turn on delay time	$t_{d(on)}$	-	66	-	ns	$V_{GS}=10V, R_G=25\Omega, V_{DD}=325V, I_D=35A$
Rise time	t_r	-	165	-		
Turn off delay time	$t_{d(off)}$	-	192	-		
Fall time	t_f	-	59	-		
Total gate charge	Q_g	-	76.6	-	nC	$V_{GS}=10V, V_{DD}=520V, I_D=35A$
Gate – Source charge	Q_{gs}	-	19.5	-		
Gate – Drain charge	Q_{gd}	-	38.6	-		
Gate resistance	R_G	-	6.1	-	Ω	$V_{GS} = 0V, f = 1.0MHz$

5) $C_{o(er)}$ is a capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0V to 80% $V_{(BR)DSS}$

■ Reverse Diode Characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Continuous diode forward current	I_{SD}	-	-	35	A	
Diode forward voltage	V_{SD}	-	-	1.4	V	$I_{SD} = 35\text{A}$, $V_{GS} = 0\text{V}$
Reverse recovery time	t_{rr}	-	382	-	ns	$I_{SD} = 35\text{A}$ $di/dt = 100\text{A}/\mu\text{s}$ $V_{DD} = 100\text{V}$
Reverse recovery charge	Q_{rr}	-	5.0	-	μC	
Reverse recovery current	I_{rrm}	-	26.3	-	A	

■ Characteristic Graph

Fig.1 On-Region Characteristics.

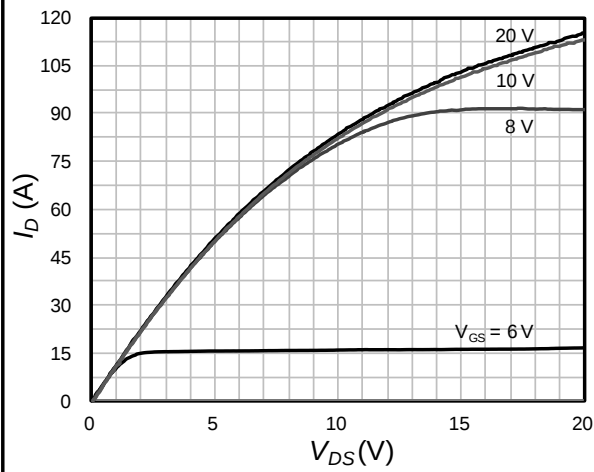


Fig.2 On-Resistance Variation with Drain Current and Gate Voltage

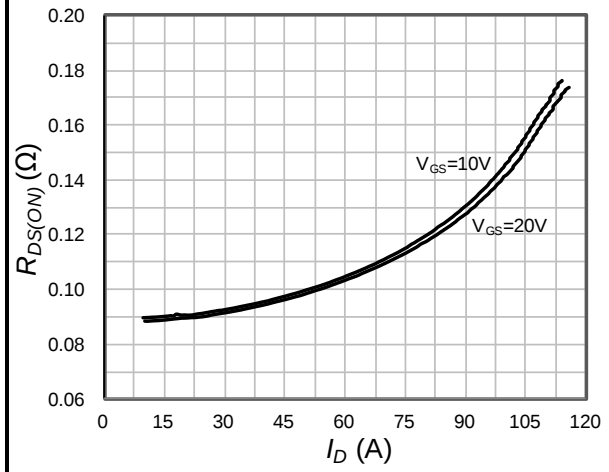


Fig.3 On-Resistance Variation with Temperature (Normalized)

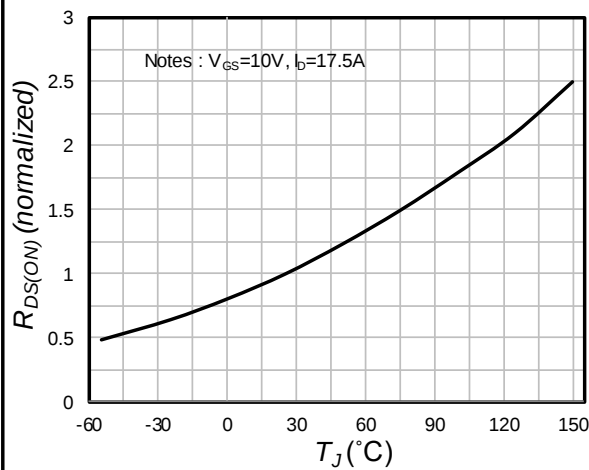


Fig.4 Breakdown Voltage Variation vs. Temperature (Normalized)

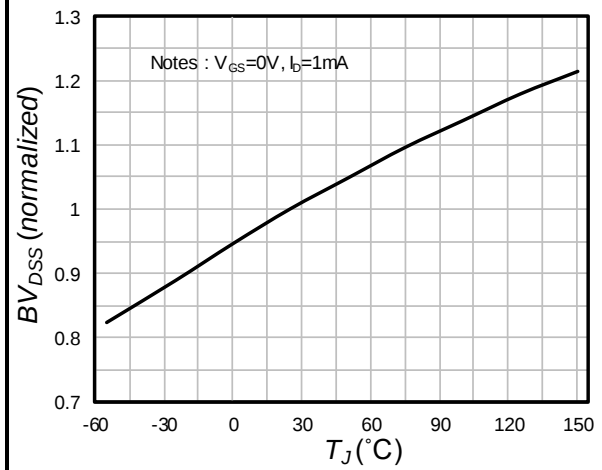


Fig.5 Transfer Characteristics

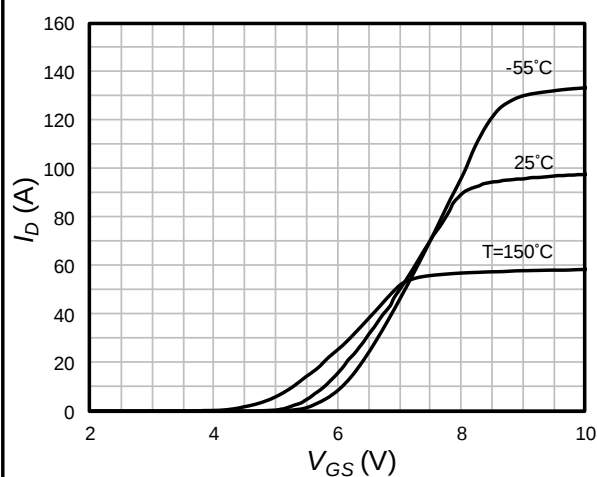


Fig.6 Body Diode Forward Voltage Variation with Source Current and Temperature

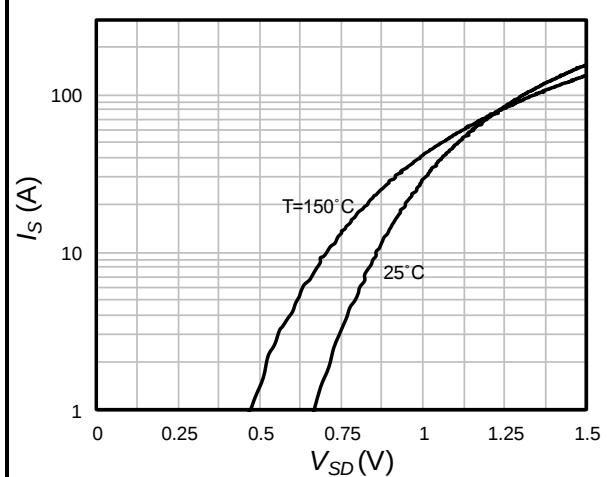


Fig.7 Gate Charge Characteristics

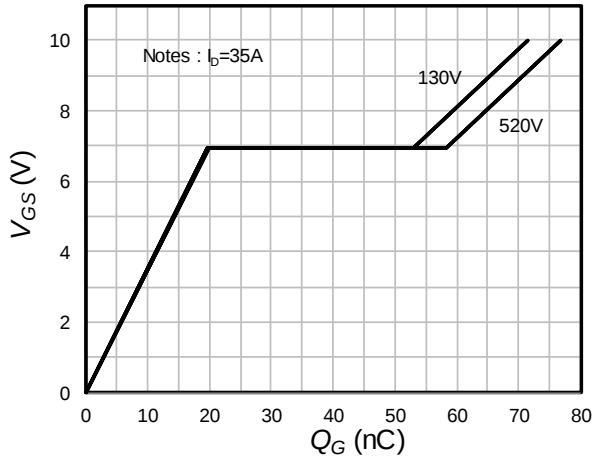


Fig.8 Capacitance Characteristics

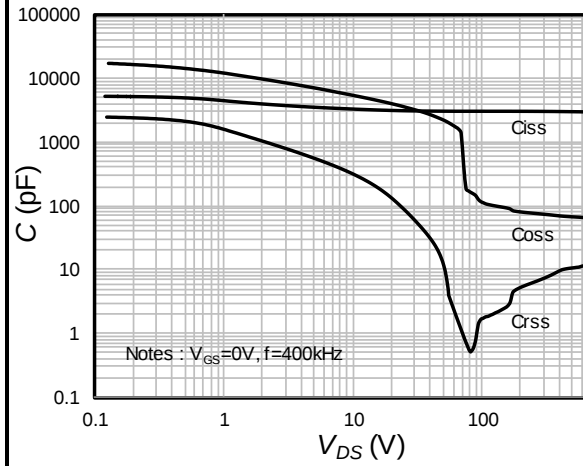
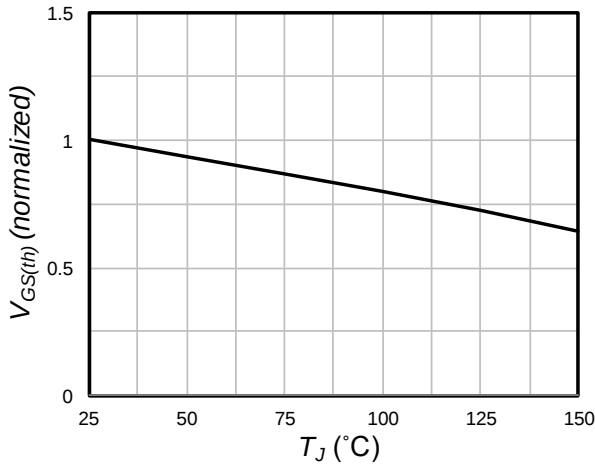

Fig.9 $V_{GS(th)}$ Variation with Temperature (Normalized)


Fig.10 Maximum Drain Current vs. Case Temperature

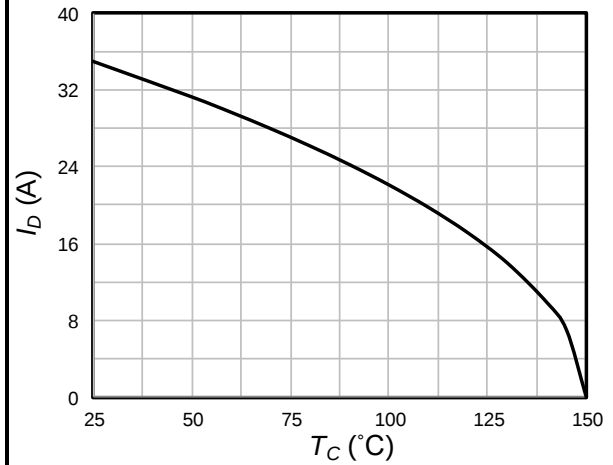


Fig.11 Single Pulse Maximum Power Dissipation

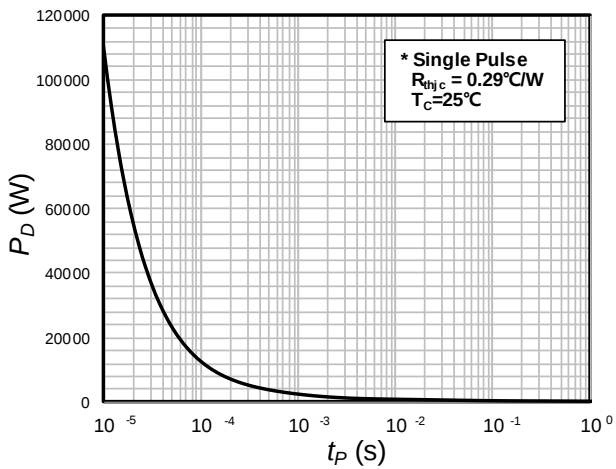


Fig.12 Output Capacitance Stored Energy

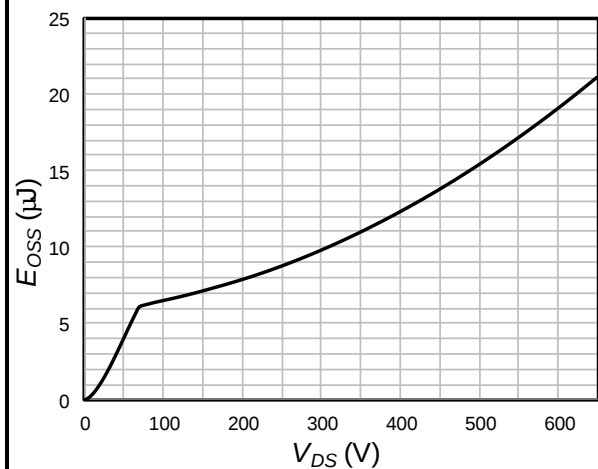


Fig.13 Transient Thermal Response Curve


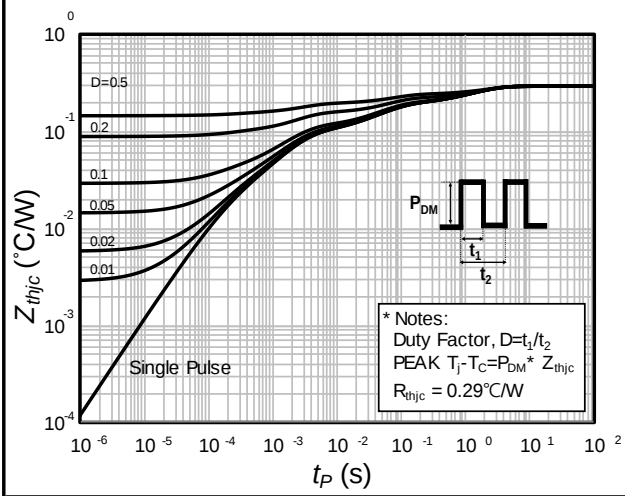


Fig.14 Maximum Safe Operating Area

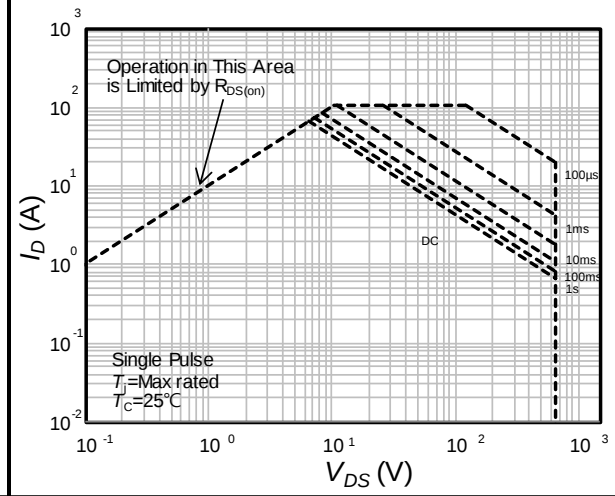

■ Test Circuit

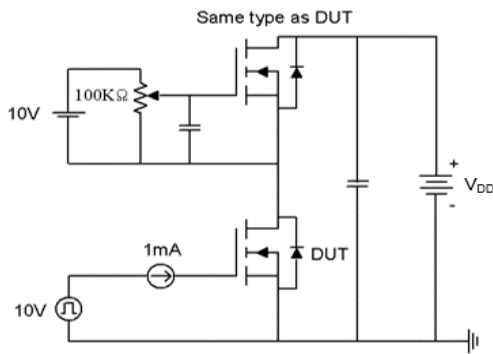


Fig15-1. Gate charge measurement circuit

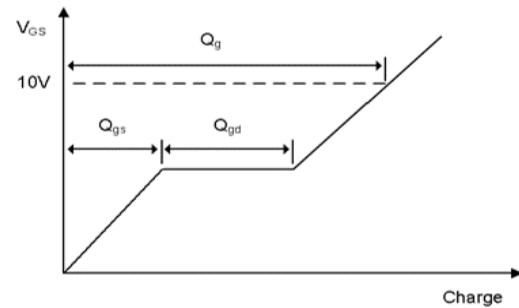


Fig15-2. Gate charge waveform

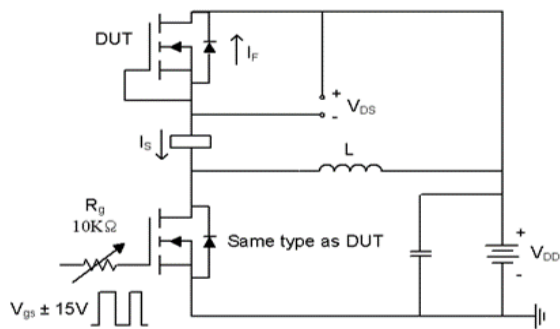


Fig16-1. Diode reverse recovery test circuit

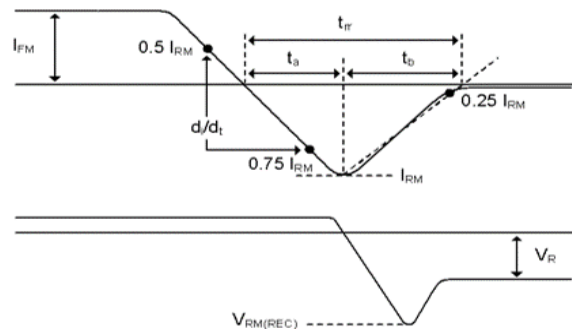


Fig16-2. Diode reverse recovery test waveform

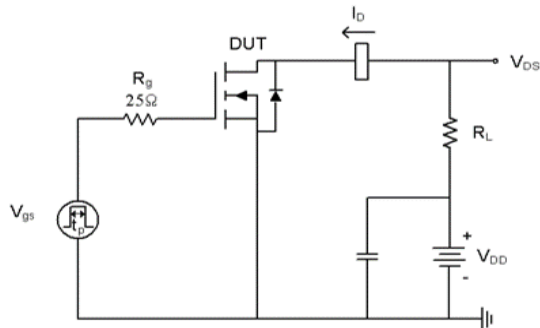


Fig17-1. Switching time test circuit for resistive load

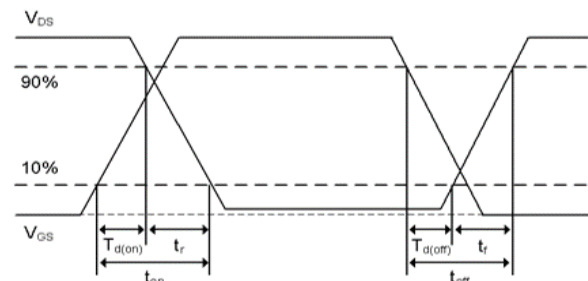


Fig17-2. Switching time waveform

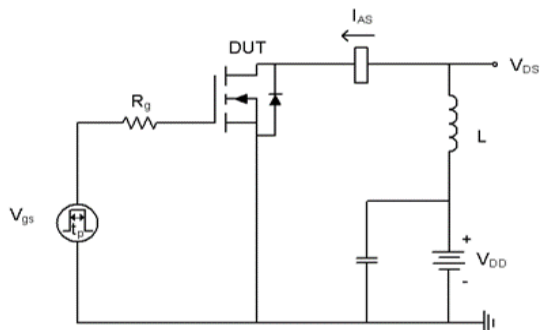


Fig18-1. Unclamped inductive load test circuit


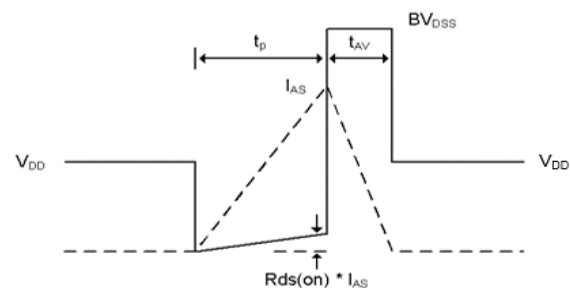


Fig18-2. Unclamped inductive waveform

■ Physical Dimension

TOLL

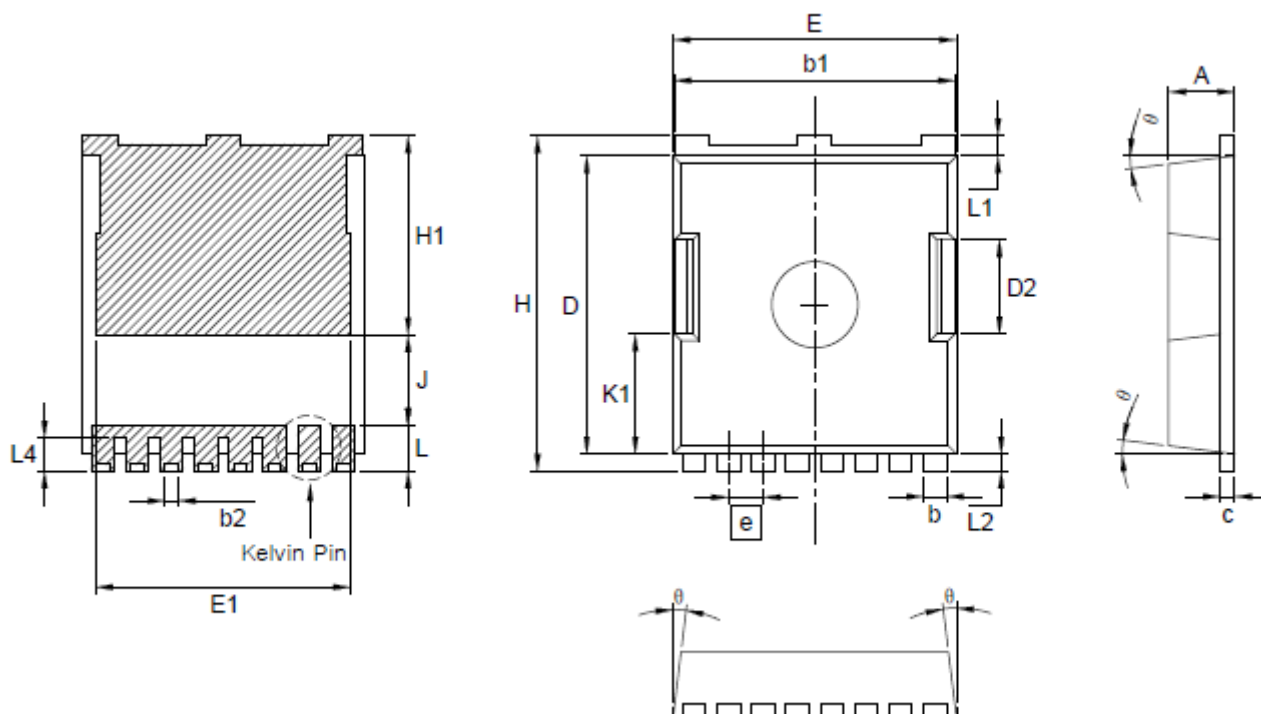

Note : Package body size, length and width do not include mold flash, protrusions and gate burrs

Symbol	Dimension (mm)		
	Min	Nom	Max
A	2.20	—	2.40
b	0.70	—	0.90
b1	9.70	—	9.90
b2	0.42	—	0.50
c	0.40	—	0.60
D	10.28	—	10.58
D2	3.10	3.30	3.50
E	9.70	9.90	10.10
E1	7.70	8.00	8.30
e	BSC 1.20		
H	11.48	11.68	11.90
H1	6.75	—	7.15
J	2.80	—	3.30
K1	3.98	4.18	4.38
L	1.38	1.60	1.98
L1	0.60	0.70	0.80
L2	0.50	0.60	0.70
L4	1.00	1.15	1.30
θ	4°	7°	10°

DISCLAIMER:

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

Magnachip reserves the right to change the specifications and circuitry without notice at any time. Magnachip does not consider responsibility for use of any circuitry other than circuitry entirely included in a Magnachip product.  Magnachip is a registered trademark of Magnachip Semiconductor Ltd.