

Product Highlight

Features



- High switching speed with a low gate charge
- Fast intrinsic diode with low reverse recovery
- Robust Avalanche Capability
- 100% Avalanche Tested
- Pb-free, Halogen Free, and RoHS Compliant

Benefits

- System efficiency improvement
- Higher frequency applicability
- Increased power density
- Reduced cooling effort

Applications

- Solar inverter
- EV charging station
- UPS
- Industrial power supply

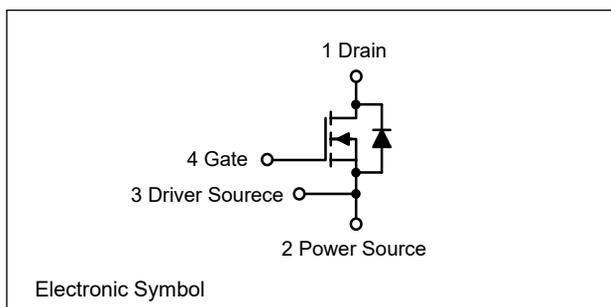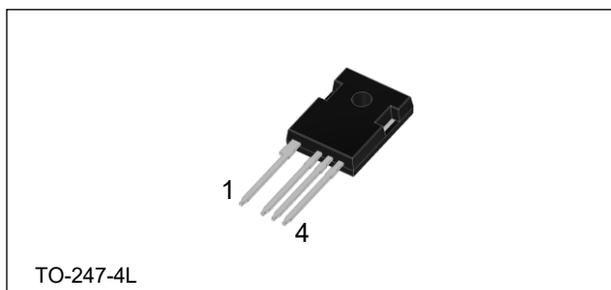

Key Parameters

$BV_{DSS, T_C=25^\circ C}$	$I_{D, T_C=25^\circ C}$	$R_{DS(on), typ}$	$Q_{g, typ}$
1200 V	118 A	16 mΩ	152 nC



Package Marking and Ordering Information

Part Number	Top Marking	Package	Packing Method	Quantity
MSQS120R016T2TH	120R016T2	TO-247-4L	Tube	30 units

Absolute Maximum Ratings ($T_C = 25^\circ C$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{DSS}	Drain to Source Voltage	1200	V
V_{GS}	Gate to Source Voltage (DC)	-10 / +22	V
V_{GSop}	Recommended Operation Value	-5...-3 / +18	V
I_D	Drain Current	Continuous ($T_C = 25^\circ C$)	118*
		Continuous ($T_C = 100^\circ C$)	84*
I_{DM}	Drain Current	Pulsed (Note1)	295*
P_D	Power Dissipation	($T_C = 25^\circ C$)	500
		Derate Above 25°C	3.3
T_J	Operating Temperature Range	-55 to 175	°C

*Limited by maximum junction temperature.

Note 1. Repetitive rating: pulse-width limited by maximum junction temperature.

1. Package

Temperature Ratings

Symbol	Parameter	Value	Unit
T_{STG}	Storage Temperature Range	-55 to 175	°C
T_L	Maximum Lead Temperature for Soldering, 1/8" from Case for 10 Seconds	260	°C

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case, Max.	0.30	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient, Max.	40	



2. MOSFET

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Off Characteristics						
BV_{DSS}	Drain to Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = 1\text{ mA}$	1200			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 1200\text{ V}, V_{GS} = 0\text{ V}$		1	100	μA
		$V_{DS} = 1200\text{ V}, V_{GS} = 0\text{ V}, T_J = 175^\circ\text{C}$		10		
I_{GSS}	Gate-Source Leakage Current	$V_{GS} = +22\text{ V}, V_{DS} = 0\text{ V}$			+100	nA
		$V_{GS} = -10\text{ V}, V_{DS} = 0\text{ V}$			-100	
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_D = 24\text{ mA}$ (tested after $V_{GS} = 22\text{ V}, 1\text{ ms pulse}$)	2.0	3.0	4.5	V
$R_{DS(on)}$	Static Drain to Source On Resistance	$V_{GS} = 18\text{ V}, I_D = 50\text{ A}$		16.0	22.4	m Ω
		$V_{GS} = 18\text{ V}, I_D = 50\text{ A}, T_J = 175^\circ\text{C}$		25.6		
		$V_{GS} = 15\text{ V}, I_D = 50\text{ A}$		21.5		
g_{fs}	Transconductance	$V_{DS} = 20\text{ V}, I_D = 50\text{ A}$		32.7		S
Dynamic Characteristics						
C_{iss}	Input Capacitance	$V_{DS} = 800\text{ V}, V_{GS} = 0\text{ V}, f = 250\text{ kHz}$		4063		μF
C_{oss}	Output Capacitance			227		
C_{riss}	Reverse Capacitance			3		
E_{oss}	Stored Energy in Output Capacitance	$V_{DS} = 0\text{ V to } 800\text{ V}, V_{GS} = 0\text{ V}$		94		μJ
$C_{o(er)}$	Energy Related Output Capacitance			295		μF
$C_{o(tr)}$	Time Related Output Capacitance			476		
$Q_{g(tot)}$	Total Gate Charge	$V_{DS} = 800\text{ V}, I_D = 50\text{ A},$ $V_{GS} = -3\text{ V} / 18\text{ V},$ Inductive load		152		nC
Q_{gs}	Gate to Source Charge			49		
Q_{gd}	Gate to Drain "Miller" Charge			29		
R_G	Internal Gate Resistance	$f = 1\text{ MHz}, V_{AC} = 30\text{ mV}$		2.7		Ω
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	$V_{DS} = 800\text{ V}, I_D = 50\text{ A},$ $V_{GS} = -3\text{ V} / 18\text{ V}, R_G = 4.7\ \Omega,$ Inductive load		32		ns
t_r	Turn-On Rise Time			25		
$t_{d(off)}$	Turn-Off Delay Time			65		
t_f	Turn-Off Fall Time			11		
E_{on}	Turn-on Switching Energy			539		μJ
E_{off}	Turn-off Switching Energy			302		
E_{tot}	Total Switching Energy			841		







3. Body Diode

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Source-Drain Diode Characteristics						
I_S	Continuous Diode Forward Current	$V_{GS} = -3\text{ V}$			105*	A
I_{SM}	Pulsed Diode Forward Current	$V_{GS} = -3\text{ V}$ (Note1)			295*	
V_{SD}	Diode Forward Voltage	$V_{GS} = -3\text{ V}, I_{SD} = 50\text{ A}$		4.0		V
t_{rr}	Reverse Recovery Time	$V_{DD} = 800\text{ V}, I_{SD} = 50\text{ A},$ $di_F/dt = 3000\text{ A}/\mu\text{s}$		22		ns
Q_{rr}	Reverse Recovery Charge			486		nC
I_{rrm}	Peak Reverse Recovery Current			37		A

*Limited by maximum junction temperature.

4. Typical Performance Characteristics

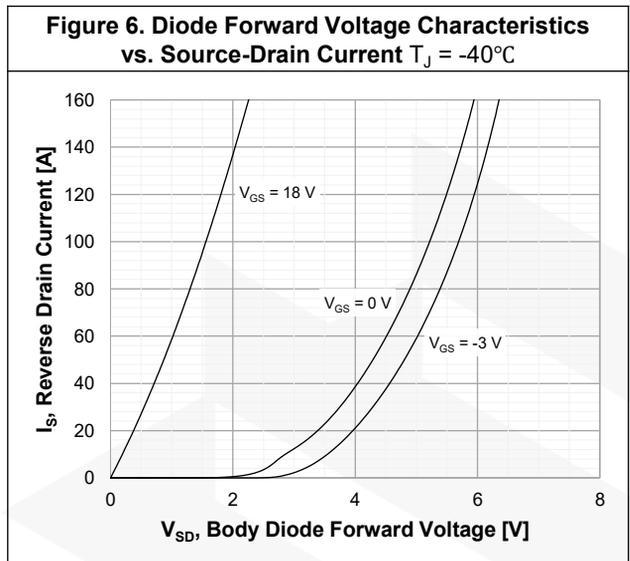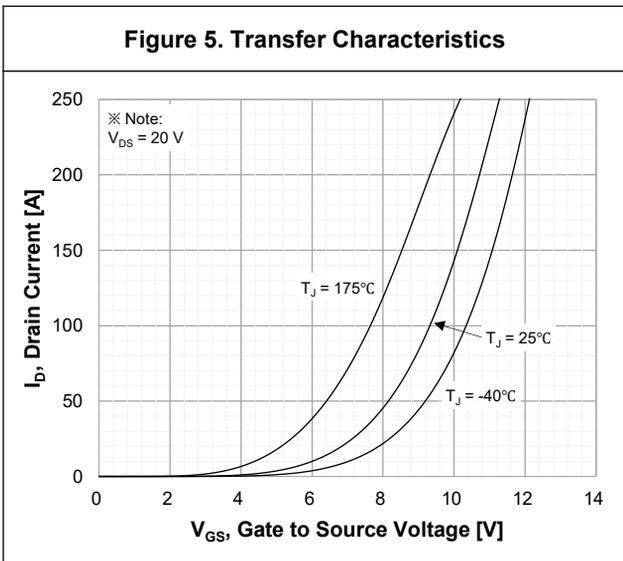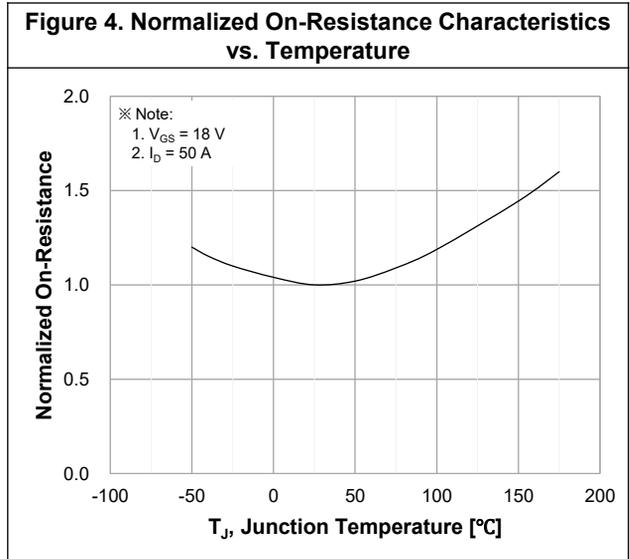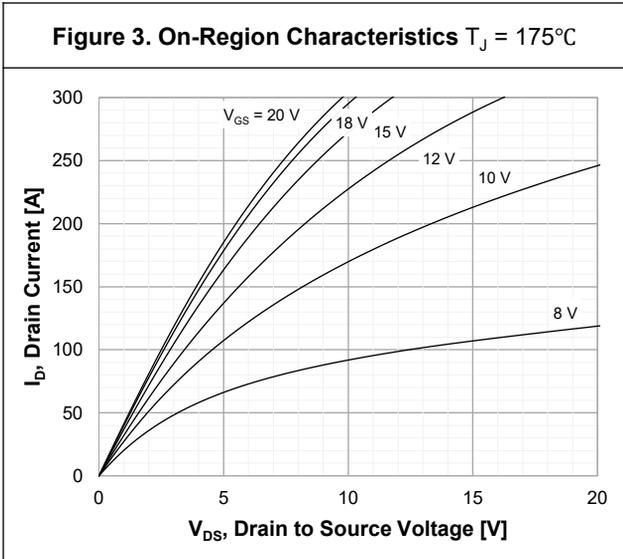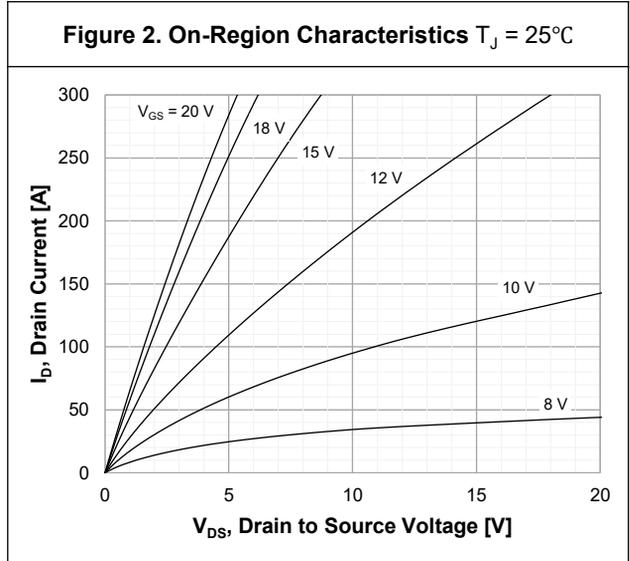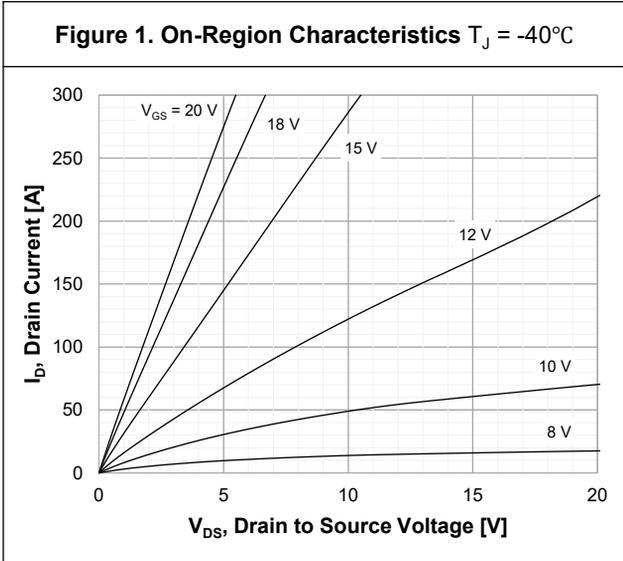

4. Typical Performance Characteristics

Figure 7. Diode Forward Voltage Characteristics vs. Source-Drain Current $T_J = 25^\circ\text{C}$

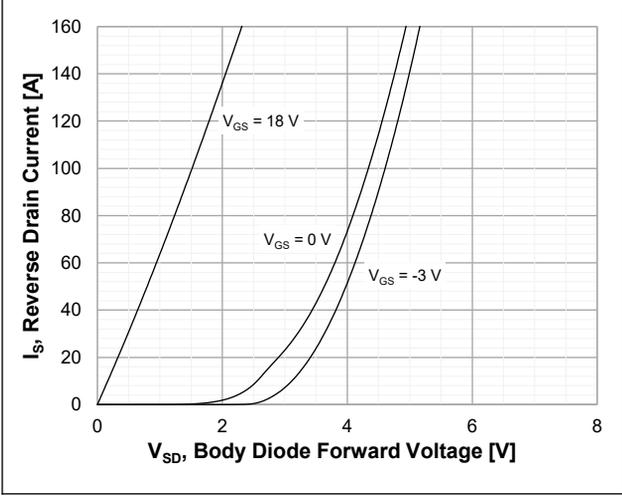


Figure 8. Diode Forward Voltage Characteristics vs. Source-Drain Current $T_J = 175^\circ\text{C}$

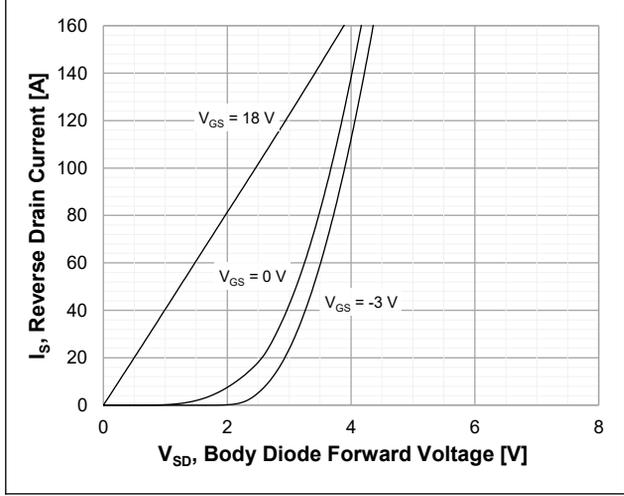


Figure 9. Threshold Voltage vs. Temperature

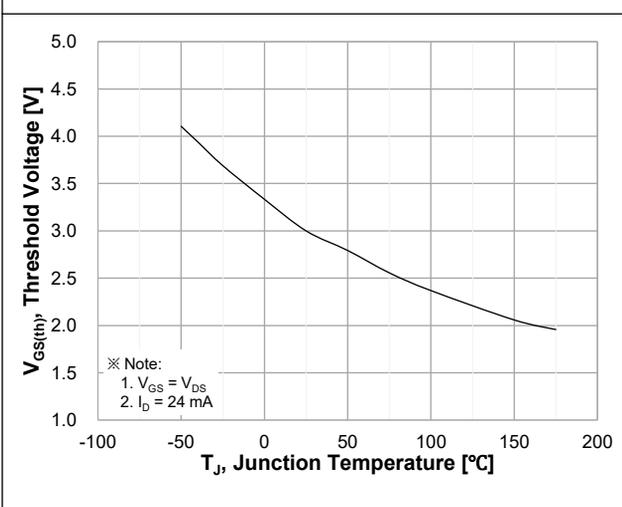


Figure 10. Gate Charge Characteristics

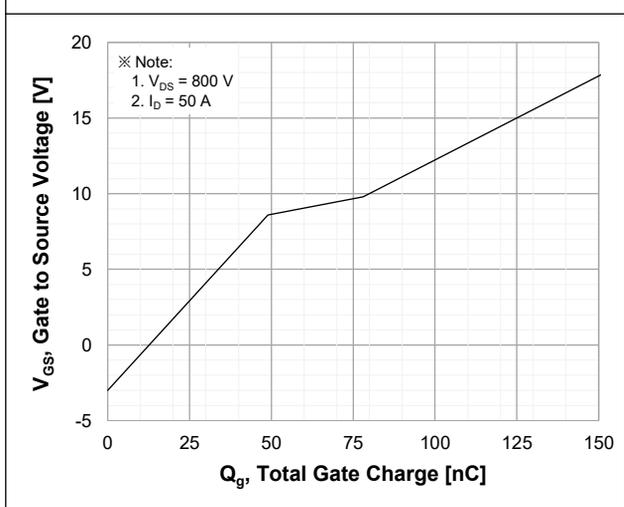


Figure 11. Stored Energy in Output Capacitance


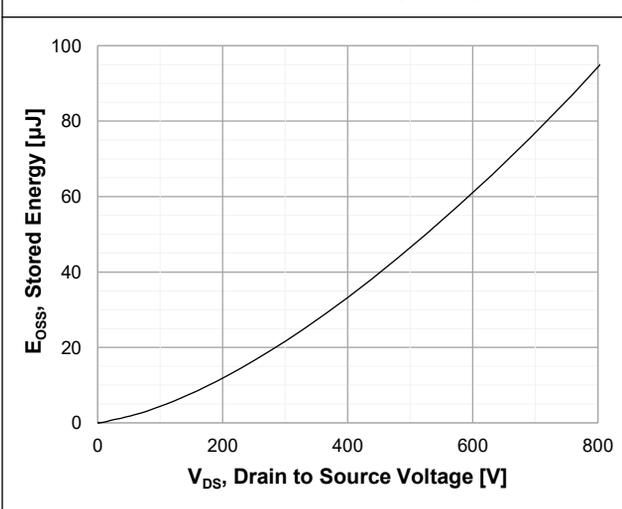


Figure 12. Capacitance Characteristics

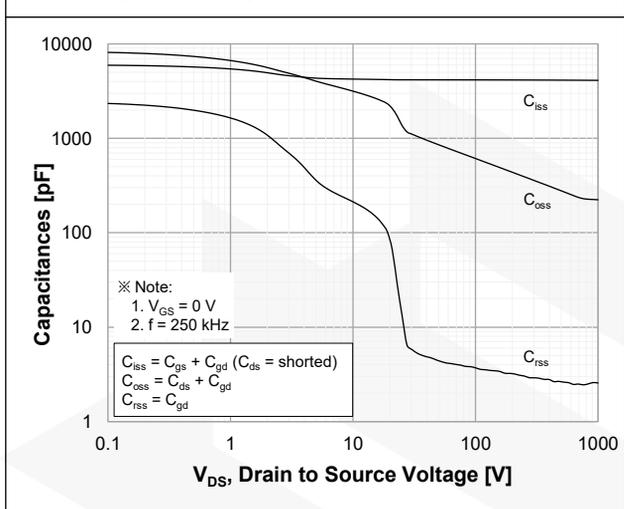

4. Typical Performance Characteristics

Figure 13. Continuous Drain Current Derating vs. Case Temperature

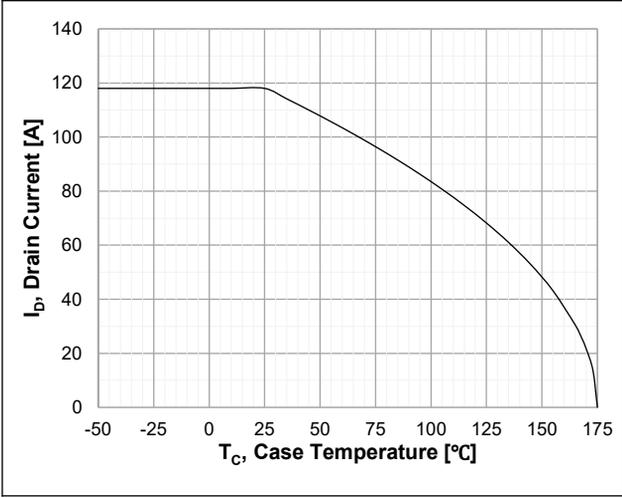


Figure 14. Maximum Power Dissipation Derating vs. Case Temperature

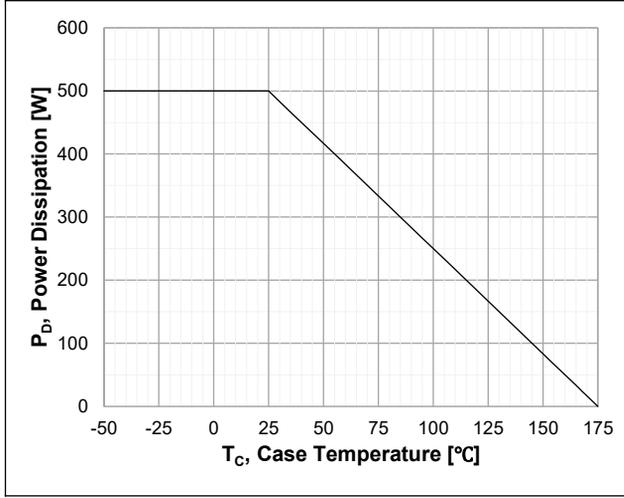


Figure 15. Typ. Switching Losses vs. Drain Current

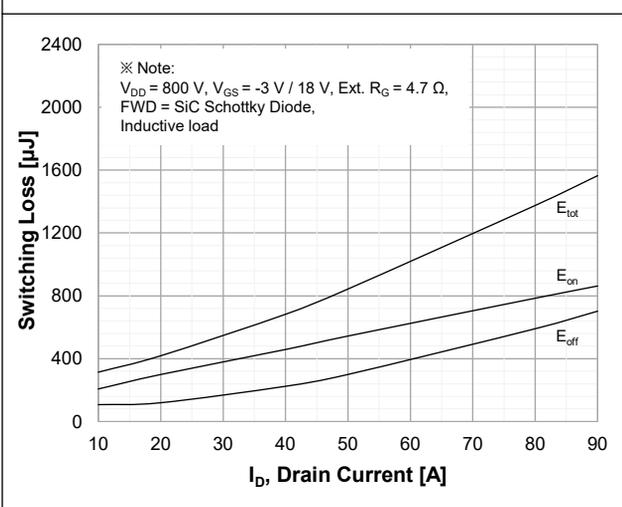


Figure 16. Typ. Switching Losses vs. Gate Resistance

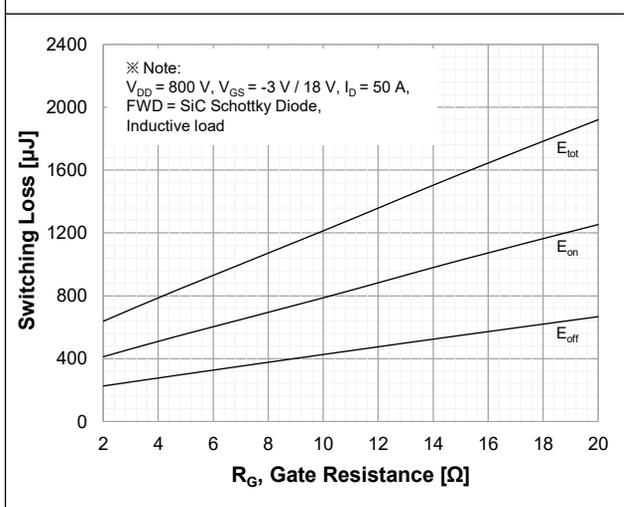


Figure 17. Typ. Switching Losses vs. Drain Current


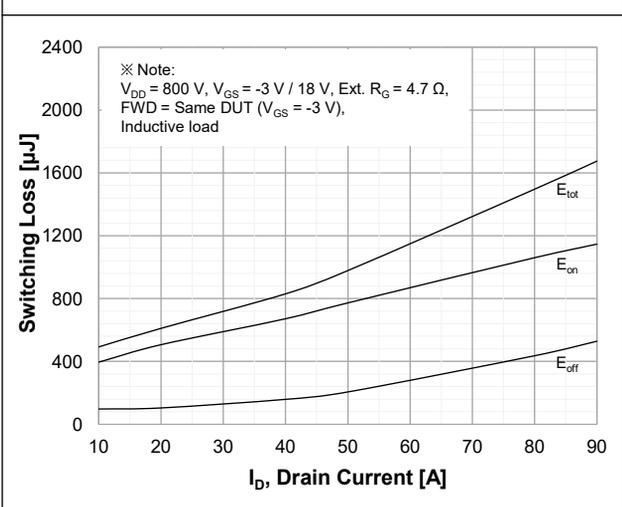


Figure 18. Typ. Switching Losses vs. Gate Resistance

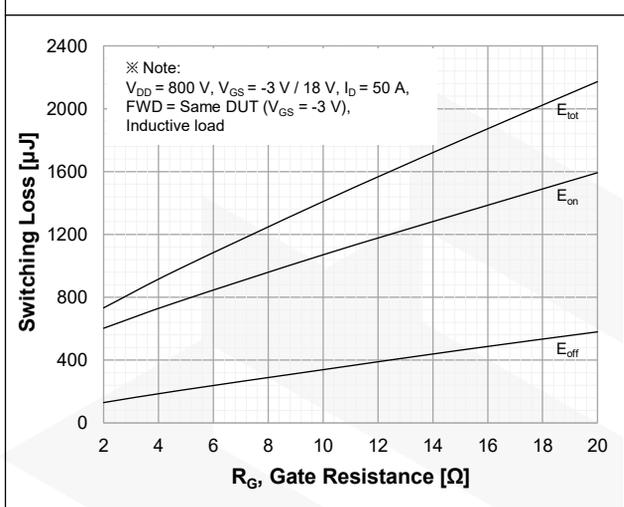

4. Typical Performance Characteristics

Figure 19. Maximum Safe Operating Area


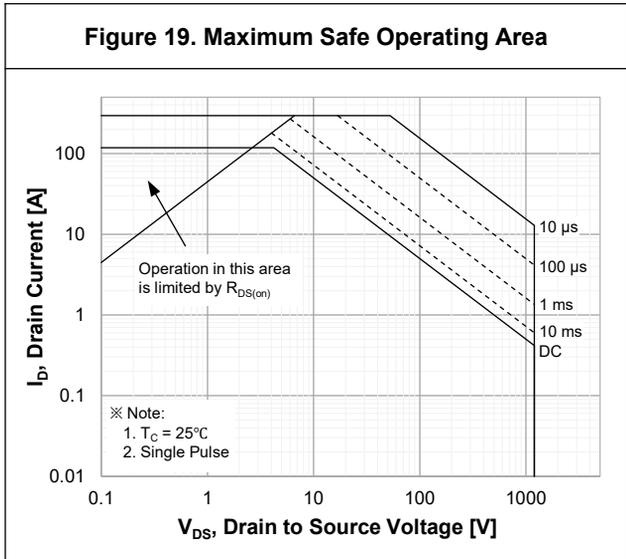


Figure 20. Transient Thermal Response Curve

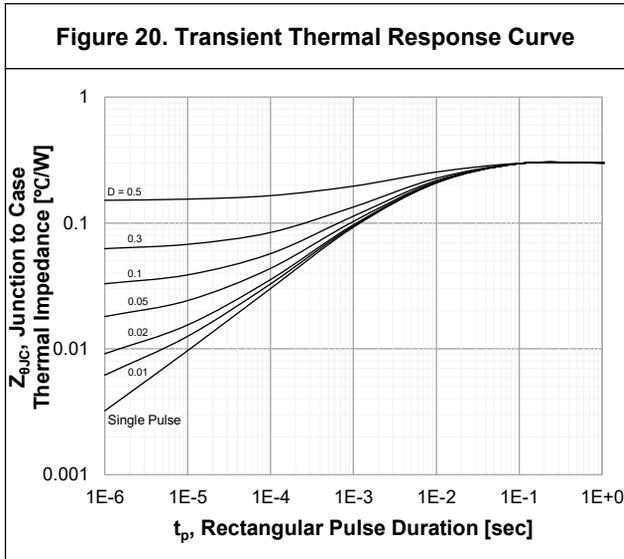

5. Testing conditions

Figure 21. Inductive Load Switching Test Circuit and Waveforms



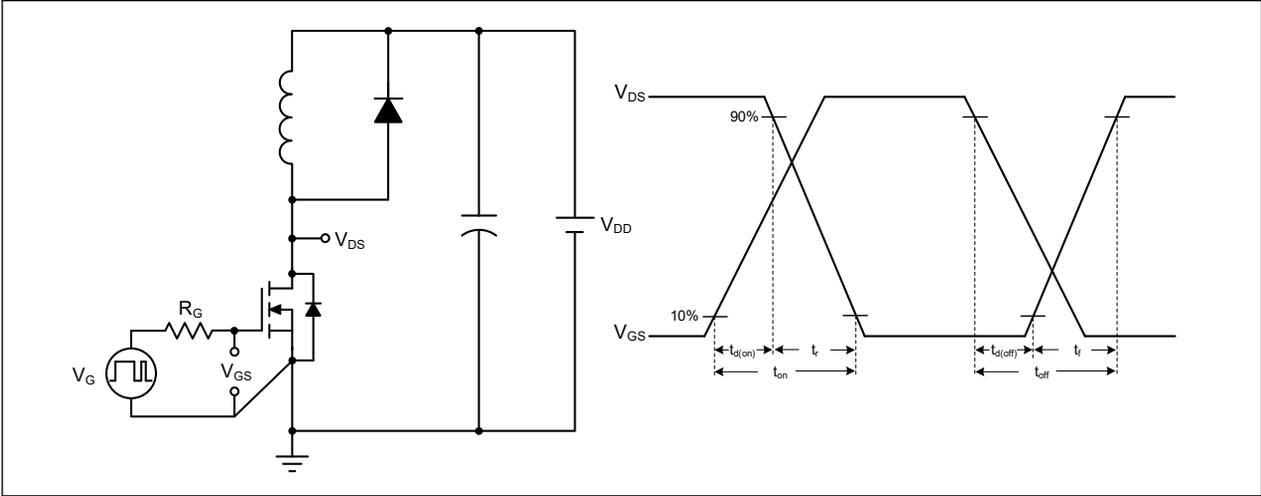


Figure 22. Peak Diode Recovery dv/dt Test Circuit and Waveforms

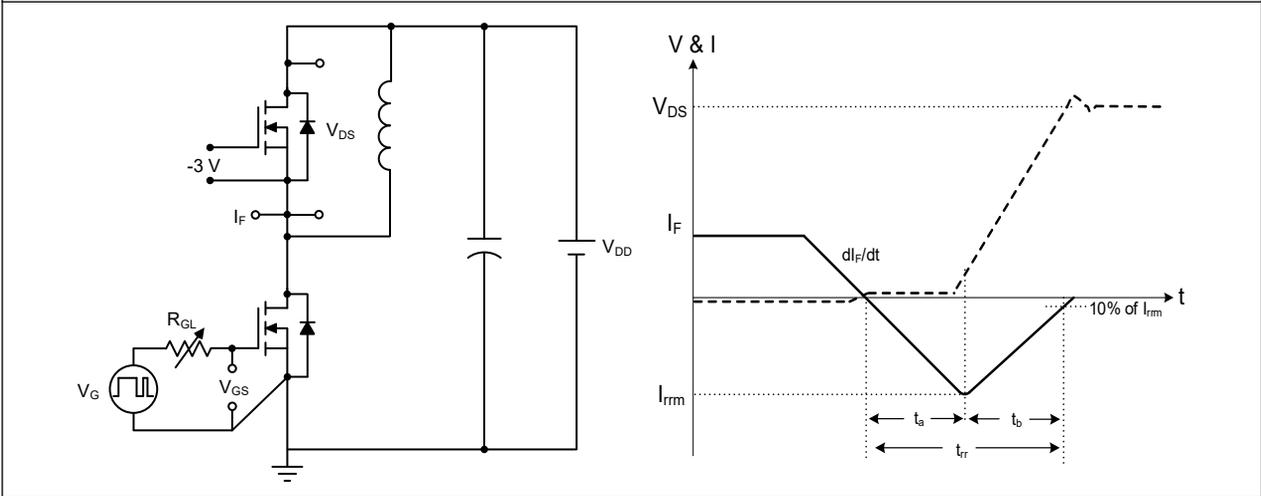

6. Package Outlines – TO-247-4L

* Dimensions in millimeters

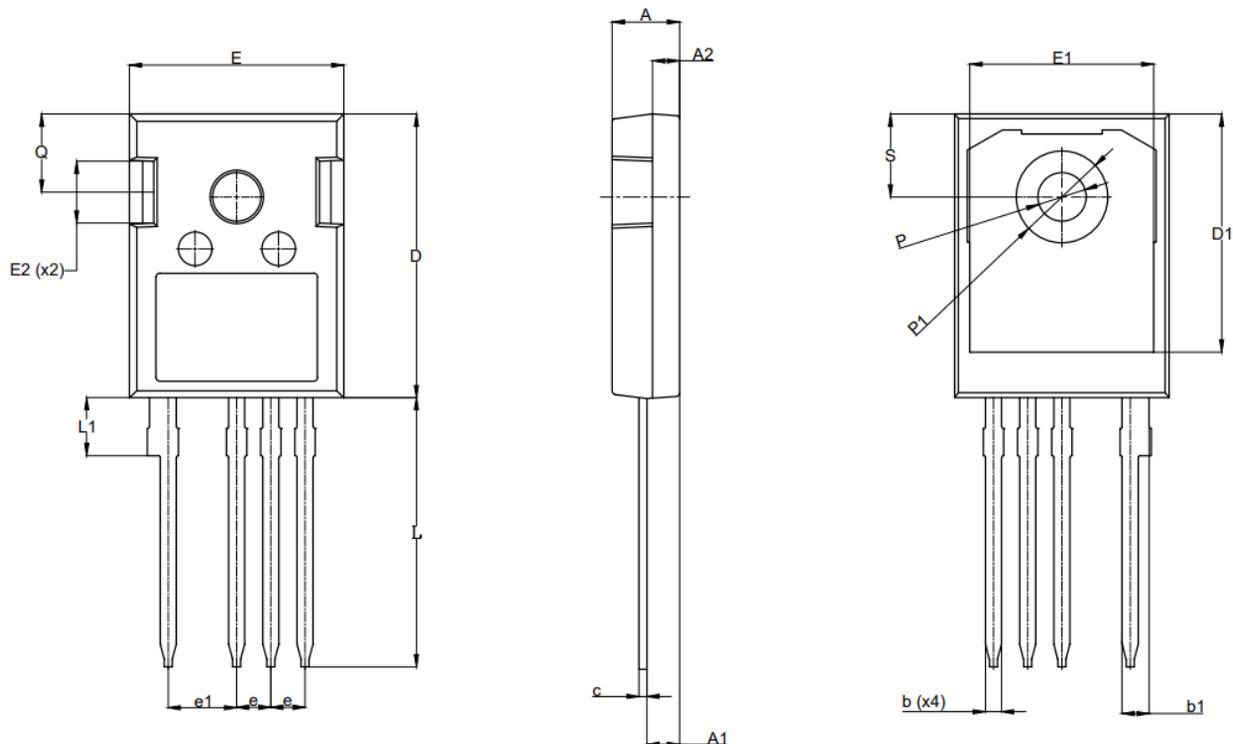

SYMBOL	Common		
	DIMENSIONS MILLIMETER		
	MIN.	NOM.	MAX.
A	4.80	5.00	5.20
A1	2.29	2.42	2.54
A2	1.90	2.00	2.10
b	1.10	1.20	1.30
b1	1.86	2.01	2.15
c	0.50	0.60	0.70
D	20.90	21.00	21.10
D1	17.43	17.63	17.83
E	15.75	15.94	16.13
E1	13.46	13.66	13.86
E2	4.32	4.58	4.83
e	2.54 BSC.		
e1	5.08 BSC.		
L	19.80	19.95	20.10
L1	-	-	4.30
P	3.56	3.61	3.66
P1	6.75	6.80	6.85
Q	5.38	5.79	6.20
S	6.15 BSC.		