

Product Highlight

Features



- High switching speed with a low gate charge
- Fast intrinsic diode with low reverse recovery
- Robust Avalanche Capability
- 100% Avalanche Tested
- Pb-free, Halogen Free, and RoHS Compliant

Benefits

- System efficiency improvement
- Higher frequency applicability
- Increased power density
- Reduced cooling effort

Applications

- Solar inverter
- EV charging station
- UPS
- Industrial power supply

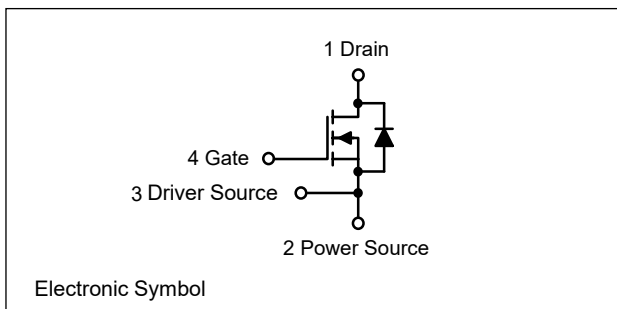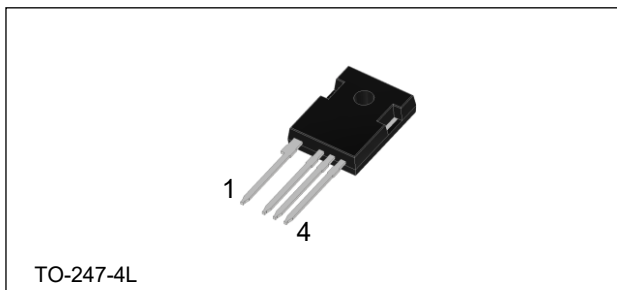

Key Parameters

$BV_{DSS, T_C=25^\circ C}$	$I_{D, T_C=25^\circ C}$	$R_{DS(on), typ}$	$Q_{g, typ}$
1200 V	68 A	31 mΩ	75 nC



RoHS Compliant
HALOGEN-FREE

Package Marking and Ordering Information

Part Number	Top Marking	Package	Packing Method	Quantity
MSQS120R031T2TH	120R031T2	TO-247-4L	Tube	30 units

Absolute Maximum Ratings ($T_C = 25^\circ C$ unless otherwise noted)

Symbol	Parameter		Value	Unit
V_{DSS}	Drain to Source Voltage		1200	V
V_{GS}	Gate to Source Voltage (DC)		-10 / +22	V
V_{GSop}	Recommended Operation Value		-5...-3 / +18	V
I_D	Drain Current	Continuous ($T_C = 25^\circ C$)	68*	A
		Continuous ($T_C = 100^\circ C$)	48*	
I_{DM}	Drain Current	Pulsed (Note1)	170*	A
P_D	Power Dissipation	($T_C = 25^\circ C$)	319	W
		Derate Above $25^\circ C$	2.1	W/ $^\circ C$
T_J	Operating Temperature Range		-55 to 175	$^\circ C$

*Limited by maximum junction temperature.

Note 1. Repetitive rating: pulse-width limited by maximum junction temperature.

1. Package

Temperature Ratings

Symbol	Parameter	Value	Unit
T _{STG}	Storage Temperature Range	-55 to 175	°C
T _L	Maximum Lead Temperature for Soldering, 1/8" from Case for 10 Seconds	260	°C

Thermal Characteristics

Symbol	Parameter	Value	Unit
R _{θJC}	Thermal Resistance, Junction to Case, Max.	0.47	°C/W
R _{θJA}	Thermal Resistance, Junction to Ambient, Max.	40	

2. MOSFET

Electrical Characteristics (T_C = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Off Characteristics						
BV _{DSS}	Drain to Source Breakdown Voltage	V _{GS} = 0 V, I _D = 1 mA	1200			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 1200 V, V _{GS} = 0 V		1	100	μA
		V _{DS} = 1200 V, V _{GS} = 0 V, T _J = 175°C		10		
I _{GSS}	Gate-Source Leakage Current	V _{GS} = +22 V, V _{DS} = 0 V			+100	nA
		V _{GS} = -10 V, V _{DS} = 0 V			-100	
On Characteristics						
V _{GS(th)}	Gate Threshold Voltage	V _{GS} = V _{DS} , I _D = 14 mA (tested after V _{GS} = 22 V, 1 ms pulse)	2.0	3.0	4.5	V
R _{DS(on)}	Static Drain to Source On Resistance	V _{GS} = 18 V, I _D = 34 A		31.0	43.4	mΩ
		V _{GS} = 18 V, I _D = 34 A, T _J = 175°C		49.6		
		V _{GS} = 15 V, I _D = 34 A		41.0		
g _{fs}	Transconductance	V _{DS} = 20 V, I _D = 34 A		23.9		S
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} = 800 V, V _{GS} = 0 V, f = 250 kHz		2117		pF
C _{oss}	Output Capacitance			124		
C _{rss}	Reverse Capacitance			4		
E _{oss}	Stored Energy in Output Capacitance	V _{DS} = 0 V to 800 V, V _{GS} = 0 V		53		μJ
C _{o(er)}	Energy Related Output Capacitance			165		pF
C _{o(tr)}	Time Related Output Capacitance			260		
Q _{g(tot)}	Total Gate Charge	V _{DS} = 800 V, I _D = 34 A, V _{GS} = -3 V / 18 V, Inductive load		75		nC
Q _{gs}	Gate to Source Charge			24		
Q _{gd}	Gate to Drain “Miller” Charge			13		
R _G	Internal Gate Resistance	f = 1 MHz, V _{AC} = 30 mV		2.9		Ω
Switching Characteristics						
t _{d(on)}	Turn-On Delay Time	V _{DS} = 800 V, I _D = 34 A, V _{GS} = -3 V / 18 V, R _G = 4.7 Ω, Inductive load		21		ns
t _r	Turn-On Rise Time			15		
t _{d(off)}	Turn-Off Delay Time			40		
t _f	Turn-Off Fall Time			7		
E _{on}	Turn-on Switching Energy			212		μJ
E _{off}	Turn-off Switching Energy			95		
E _{tot}	Total Switching Energy			307		







3. Body Diode

Electrical Characteristics (T_C = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Source-Drain Diode Characteristics						
I _S	Continuous Diode Forward Current	V _{GS} = -3 V			68*	A
I _{SM}	Pulsed Diode Forward Current	V _{GS} = -3 V (Note 1)			170*	
V _{SD}	Diode Forward Voltage	V _{GS} = -3 V, I _{SD} = 34 A		4.1		V
t _{rr}	Reverse Recovery Time	V _{DD} = 800 V, I _{SD} = 34 A, dI _F /dt = 3000 A/μs		16		ns
Q _{rr}	Reverse Recovery Charge			275		nC
I _{rrm}	Peak Reverse Recovery Current			28		A

*Limited by maximum junction temperature.

4. Typical Performance Characteristics

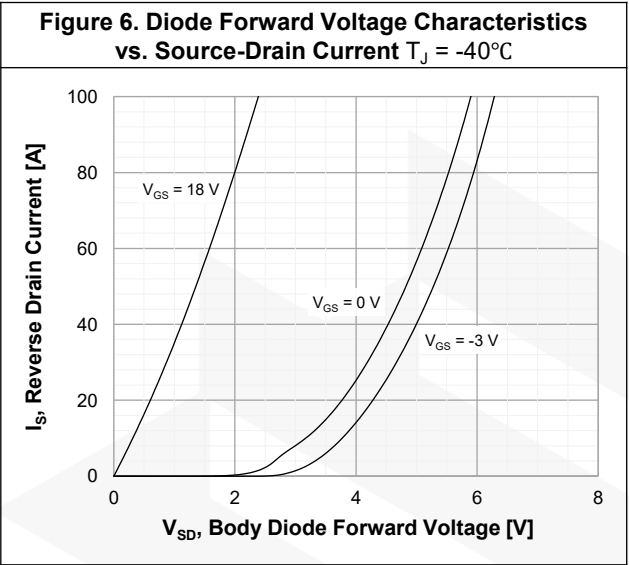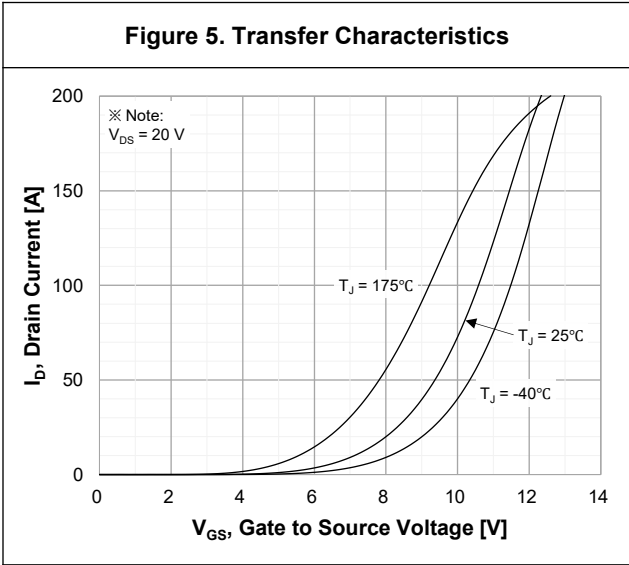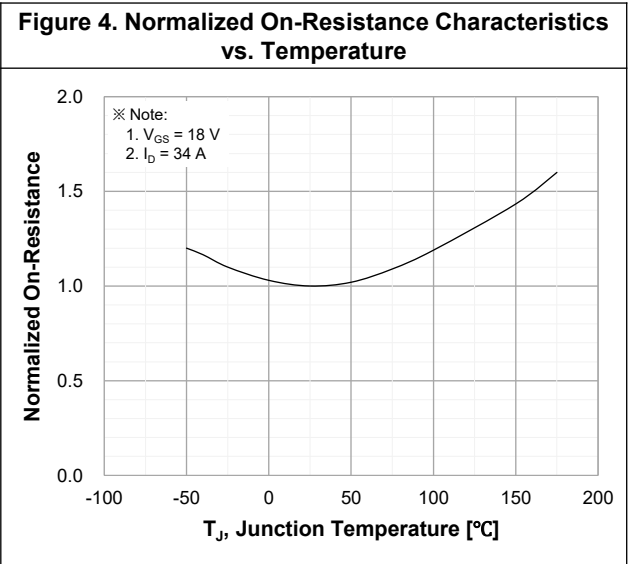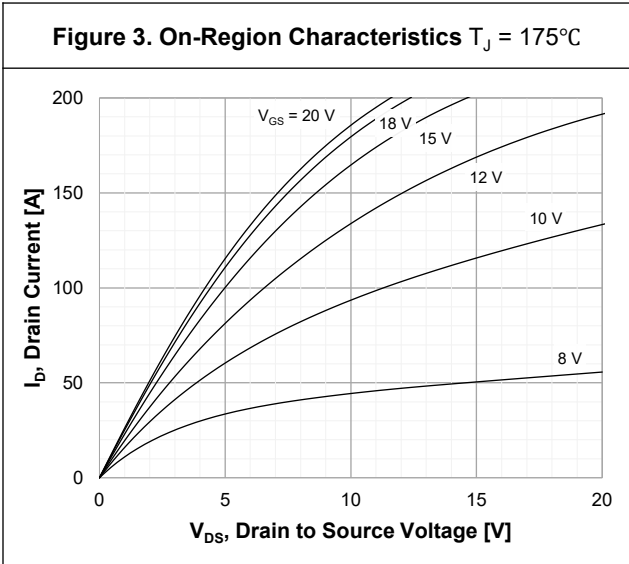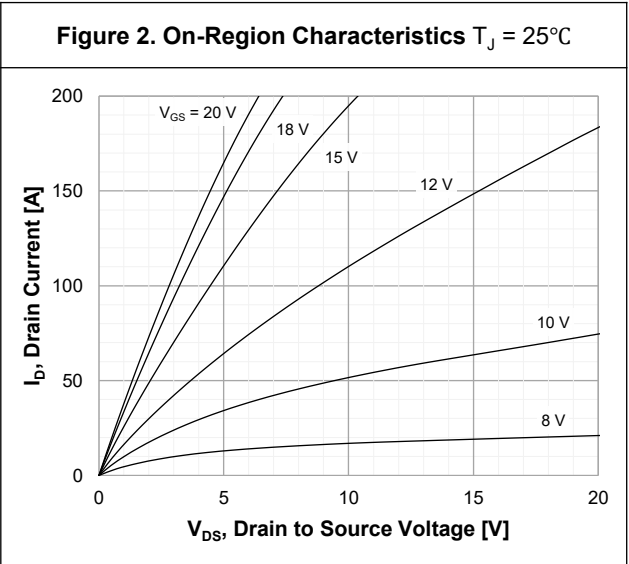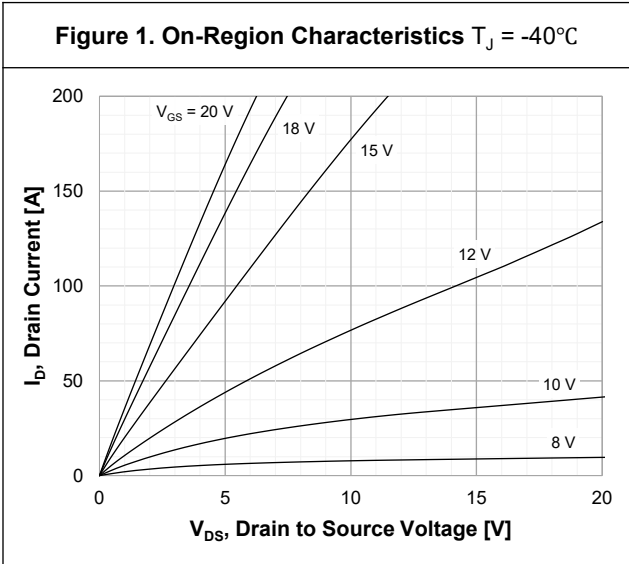

4. Typical Performance Characteristics

Figure 7. Diode Forward Voltage Characteristics vs. Source-Drain Current $T_J = 25^{\circ}\text{C}$

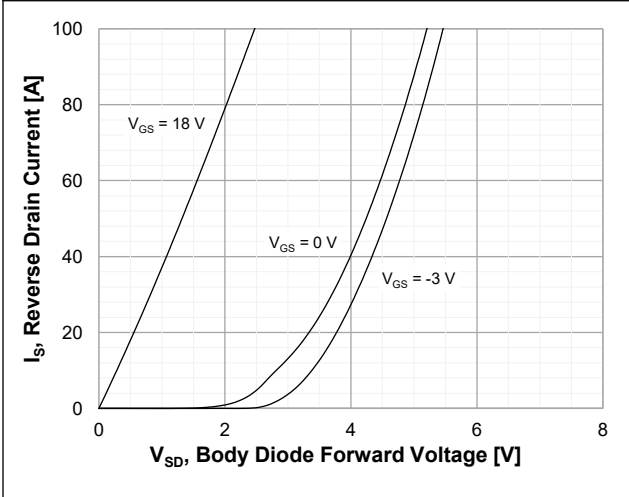


Figure 8. Diode Forward Voltage Characteristics vs. Source-Drain Current $T_J = 175^{\circ}\text{C}$

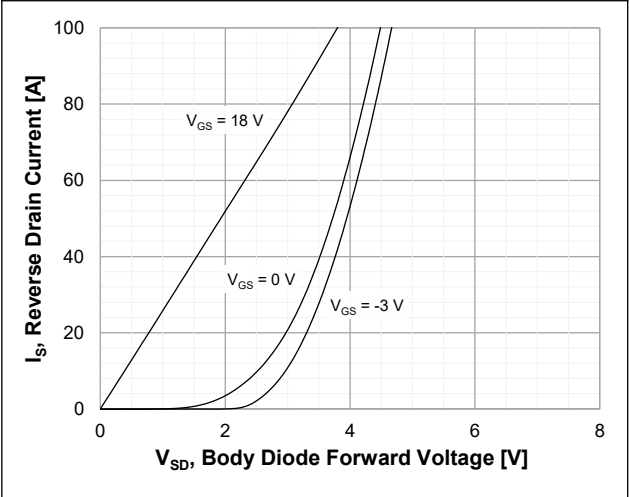


Figure 9. Threshold Voltage vs. Temperature

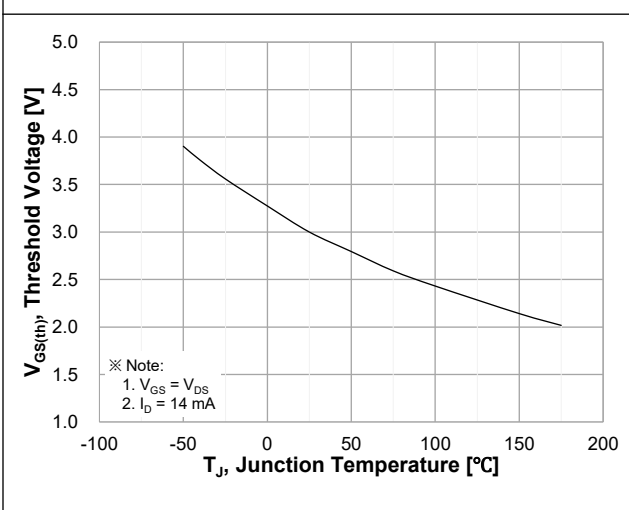


Figure 10. Gate Charge Characteristics

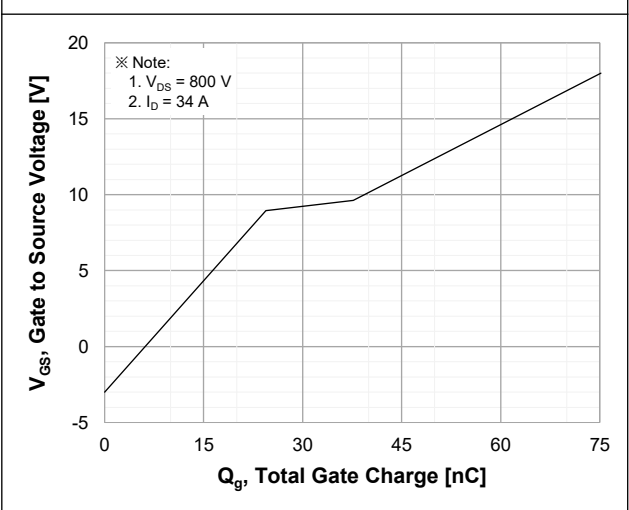


Figure 11. Stored Energy in Output Capacitance








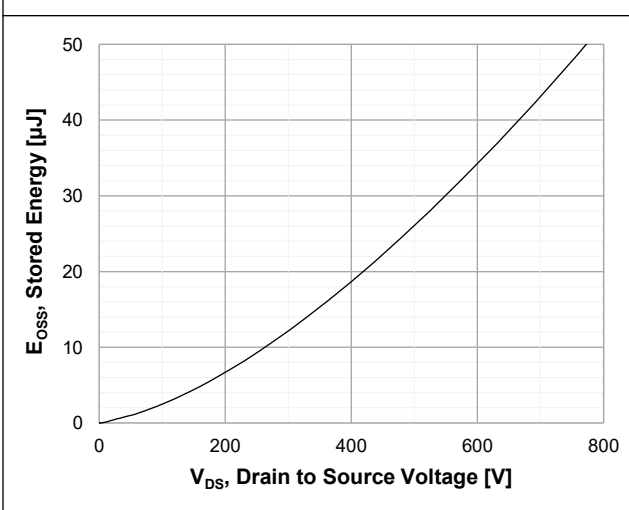




Figure 12. Capacitance Characteristics

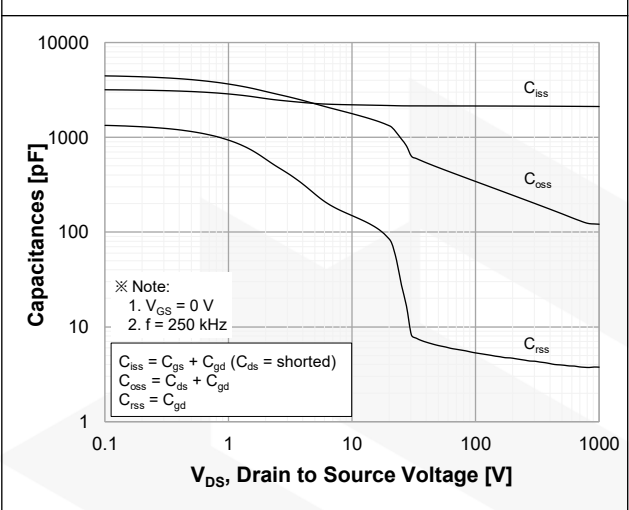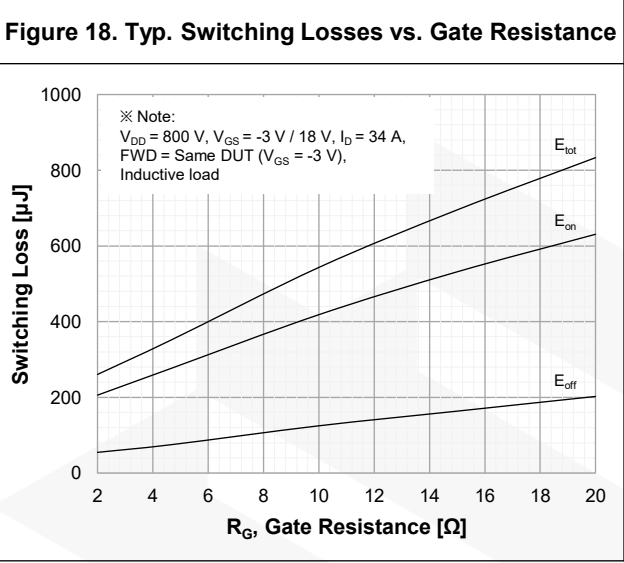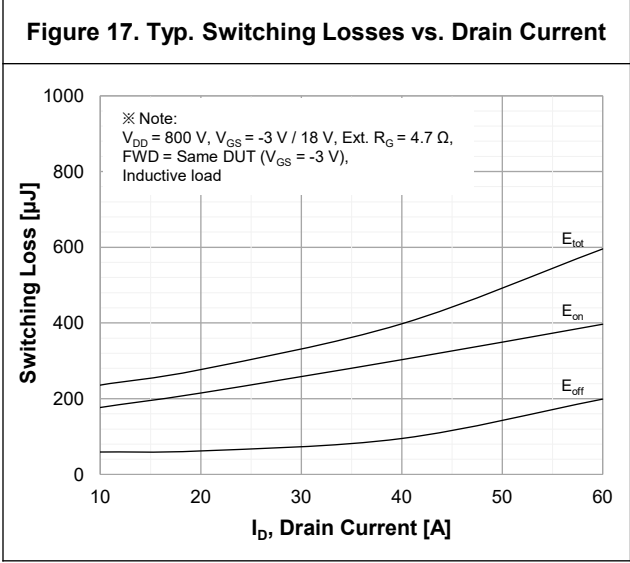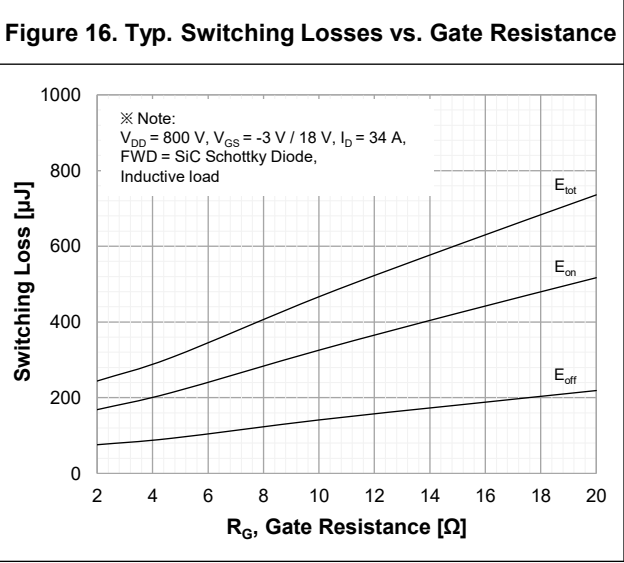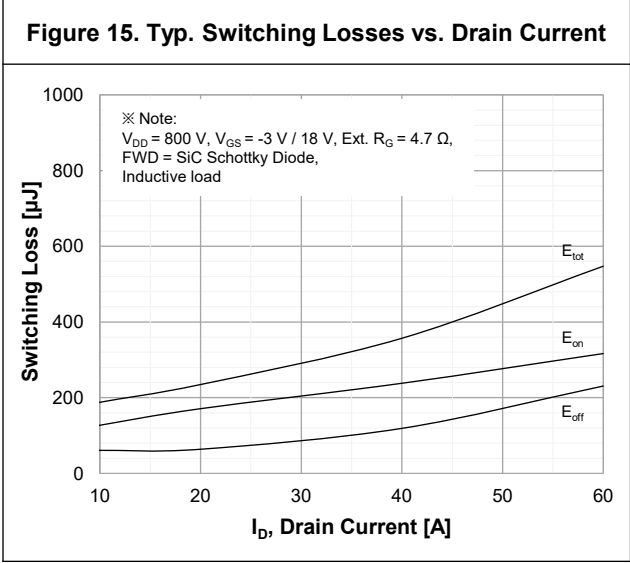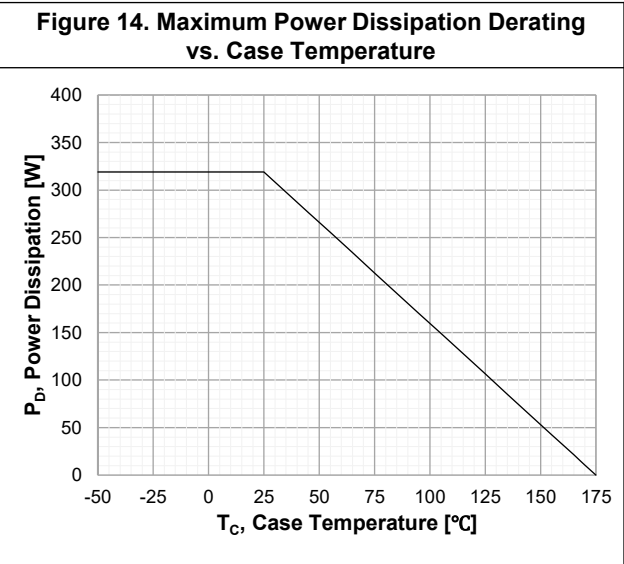

4. Typical Performance Characteristics

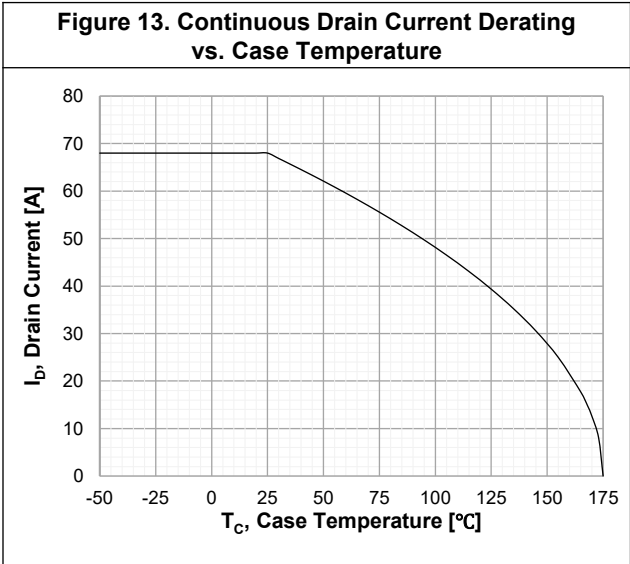

4. Typical Performance Characteristics

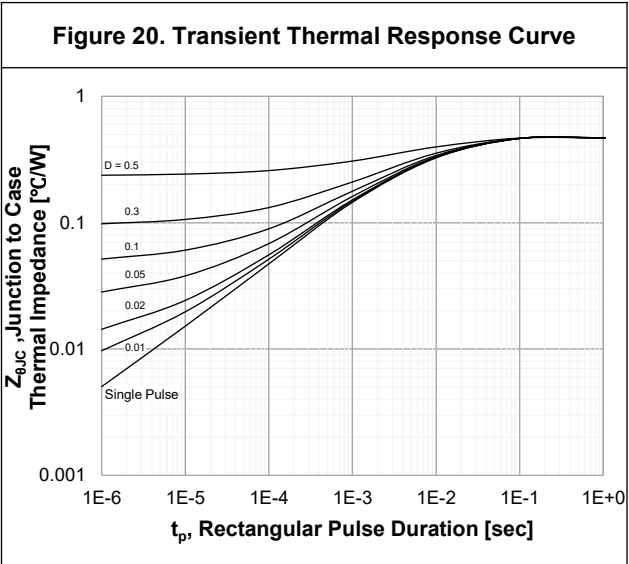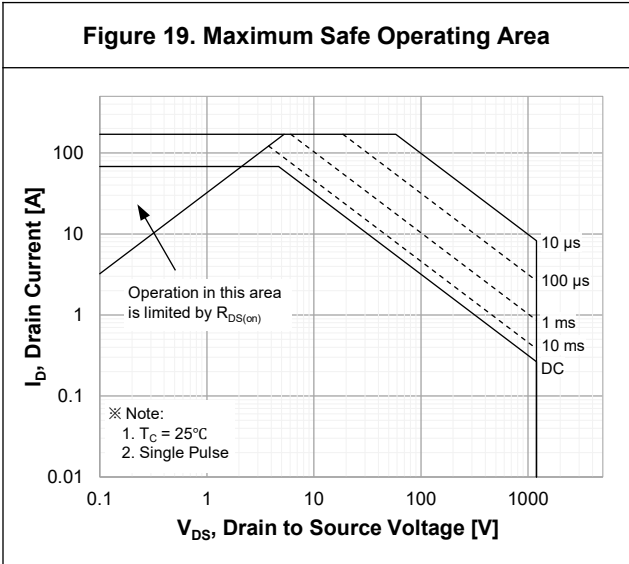

5. Testing conditions

Figure 21. Inductive Load Switching Test Circuit and Waveforms


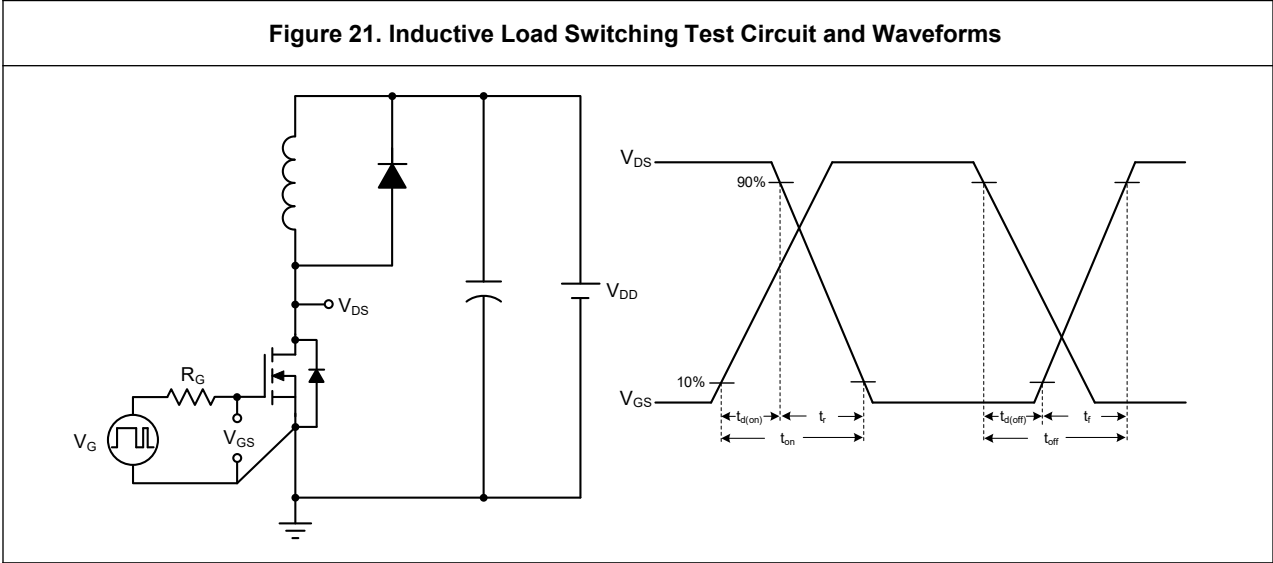


Figure 22. Peak Diode Recovery dv/dt Test Circuit and Waveforms



6. Package Outlines – TO-247-4L

* Dimensions in millimeters

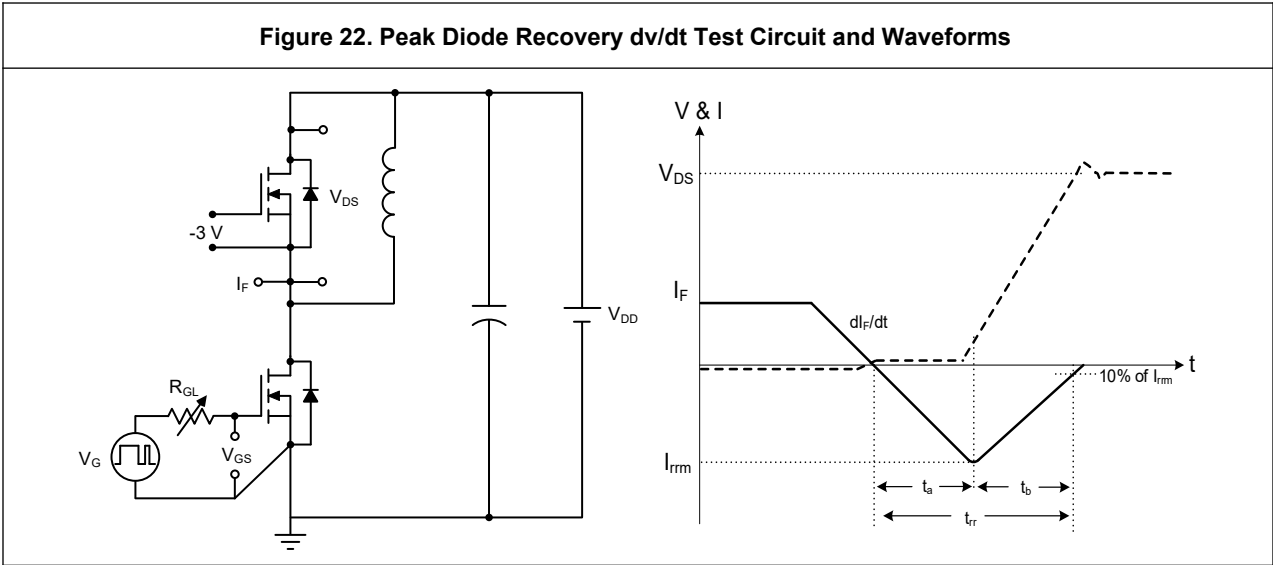